



WAAS CH 70505 W22A	APP CRS 221°	Rwy Idg TDZE 1500 Apt Elev 1500
--	------------------------	---

RNAV (GPS) RWY 22

JAMESTOWN RGNL (JMS)

▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (5°F) or above 54°C (130°F). DME/DME RNP- 0.3 NA.	MISSED APPROACH: Climb to 3700 direct GANEY and hold.
--	---

ASOS 118.425	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

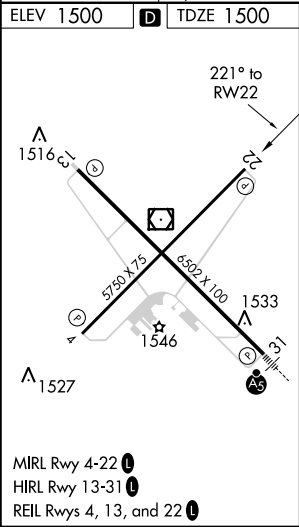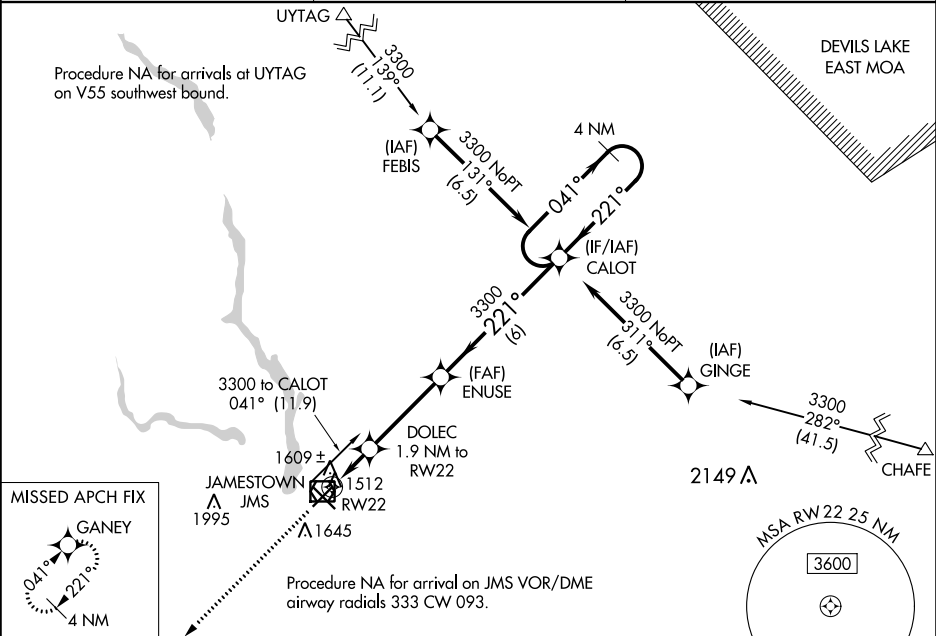

3700 GANEY VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 21).				
DOLEC 1.9 NM to RW22				
*LNAV only				
*1.1 NM to RW22				
RW22				
1.1 NM 0.9 NM 3.6 NM 6 NM				
221° to RW22				
2140*				
3300				
4 NM Holding Pattern				
041°→ 3300				
←221°				
GP 3.00° TCH 45				
CATEGORY	A	B	C	D
LPV DA	1750-3/4 250 (300-3/4)			
LNAV/VNAV DA	1790-1 290 (300-1)			
LNAV MDA	1860-1 360 (400-1)			
C CIRCLING	1960-1	460 (500-1)	2000-1½ 500 (500-1½)	2300-2½ 800 (800-2½)