

WAAS CH 56405 W25A	APP CRS 254°	Rwy Idg TDZE 812 Apt Elev 813
--	------------------------	---

RNAV (GPS) RWY 25


FINDLAY (F'DY)

RNP APCH-GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Baro-VNAV and VDP NA when using Lima Allen County altimeter setting. When local altimeter setting not received, use Lima Allen County altimeter setting: increase all DAs/MDAs 80 feet; increase LPV visibility 1/8 SM all Cats; increase LNAV Cat C/D and Circling Cat C/D visibility 1/4 SM. Circling Rwy 7 NA at night.

MISSED APPROACH:
Climb to 2500 direct
PURIC and hold.

ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.725 (CTAF) 0
-----------------------	---------------------------------------	-----------------------------------

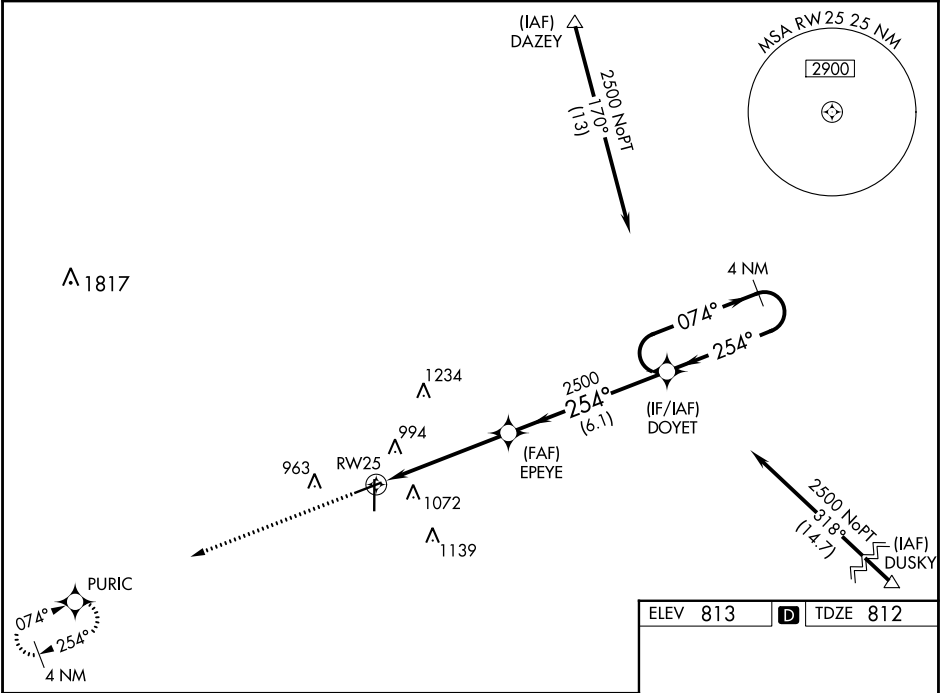

2500

↑

PURIC

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 31).

4 NM Holding Pattern

EPEYE

2500

DOYET

*LNAV only

*1.4 NM to RW25

RW25

1.4 NM

3.7 NM

6.1 NM

254°


074°

254°

2500

GP 3.00° TCH 45

CATEGORY	A	B	C	D
LPV DA	1116-1 304 (400-1)			
LNAV/VNAV DA	1411-2 599 (600-2)			
LNAV MDA	1280-1 468 (500-1)	1280-1 468 (500-1 1/2)	1280-1 468 (500-1 1/2)	1280-1 468 (500-1 1/2)
CIRCLING	1440-1 627 (700-1)	1440-1 627 (700-1 1/4)	1540-2 727 (800-2 1/4)	1540-2 727 (800-2 1/4)

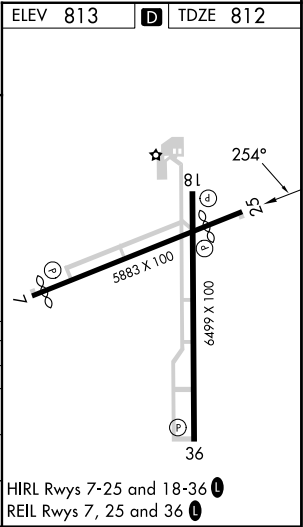

EC-2, 18 APR 2024 to 16 MAY 2024

EC-2, 18 APR 2024 to 16 MAY 2024