


## RNAV (GPS) RWY 1

|                                                                                                                                      |                                               |                           |                                                                                   |                                                                               |                                        |                           |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------|---------------------------|
| APCH CRS<br><b>008°</b>                                                                                                              |                                               | Rwy Ldg<br>THRE <b>24</b> | [USN]                                                                             |                                                                               | NEW RIVER MCAS (MC CUTCHEON FLD)(KNCA) |                           |
| RNP APCH                                                                                                                             |                                               |                           |  | MISSED APPROACH: Climb to 1500 direct CILER,<br>008° track to KEANN and hold. |                                        |                           |
| RADAR required                                                                                                                       |                                               |                           |                                                                                   |                                                                               |                                        |                           |
| <p>* When ALS inop, increase vis to 7/8 mile.</p> <p>** When ALS inop, increase vis CAT AB to 1 mile,<br/>CAT CD to 1 1/2 miles.</p> |                                               |                           |                                                                                   |                                                                               |                                        |                           |
| ATIS ★<br><b>288.325</b>                                                                                                             | CHERRY POINT APP CON<br><b>119.35 377.175</b> |                           | TOWER ★<br><b>134.95(CTAF) 0★ 360.2</b>                                           |                                                                               | GND CON<br><b>121.8 254.275</b>        | CLNC DEL<br><b>269.25</b> |
|                                                                                                                                      |                                               |                           |                                                                                   |                                                                               |                                        | ASR/PAR                   |

Baro VNAV NA below -15°C (5°F)  
and above 54°C (129°F).

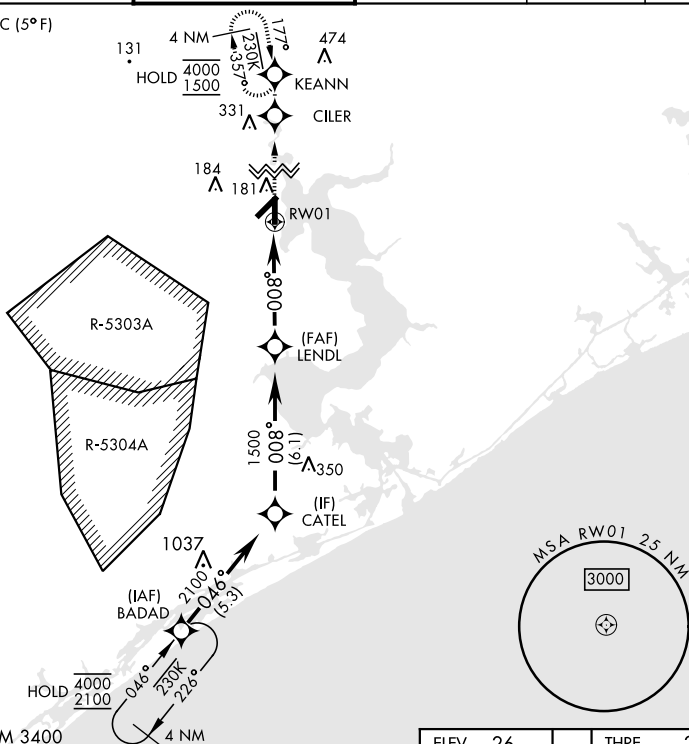

EMERG SAFE ALT 100 NM 3400

| CATEGORY        | A                    | B                    | C                      | D                      |
|-----------------|----------------------|----------------------|------------------------|------------------------|
| INAV/ VNAV DA * | 311-¾<br>287 (300-¾) | 322-¾<br>298 (300-¾) | 330-¾<br>306 (400-¾)   | 341-¾<br>317 (400-¾)   |
| INAV MDA **     | 440-¾<br>416 (500-¾) | 440-1<br>416 (500-1) | 700-2<br>674 (700-2)   | 700-2½<br>674 (700-2½) |
| CIRCLING        | 500-1<br>474 (500-1) | 700-2<br>674 (700-2) | 700-2½<br>674 (700-2½) |                        |