
to 28 NOV 2024

SC-1, 31 OCT 2024

THRPE THREE DEPARTURE (RNAV)

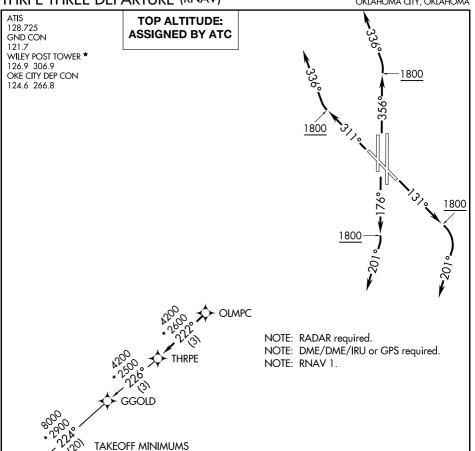

DEPARTURE ROUTE DESCRIPTION

Rwys 13, 17L/R, 31, 35L/R: Standard with minimum climb of 500' per NM to 2100.

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to OLMPC, thence

TAKEOFF RWYS 17L/R: Climb heading 176° to 1800, then right turn heading 201°

or as assigned by ATC, expect RADAR vectors to OLMPC, thence

TAKEOFF RWY 31: Climb heading 311° to 1800, then right turn heading 336° or as assigned by ATC expect PADAP vectors to CLAPC thousand

or as assigned by ATC, expect RADAR vectors to OLMPC, thence . . .

TAKEOFF RWYS 35L/R: Climb heading 356° to 1800, then left turn heading 336° or as assigned by ATC, expect RADAR vectors to OLMPC, thence

.... on track 222° to THRPE, then on (transition). Maintain 3000 or as assigned by ATC.

Expect filed altitude 10 minutes after departure.

FLECH TRANSITION (THRPE3.FLECH)
GGOLD TRANSITION (THRPE3.GGOLD)

NOTE: Chart not to scale.

≻ FLECH

V