


WAAS CH 58336 W28B	APP CRS 276°	Rwy Idg TDZE 65 Apt Elev 65	8000
--	------------------------	---	-------------

RNAV (GPS) RWY 28L
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

RNP APCH-GPS.		MALSF	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct GEGEY and hold.
Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.			

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
------------------------	---------------------------------------	---	-------------------------	--------------------------	-------

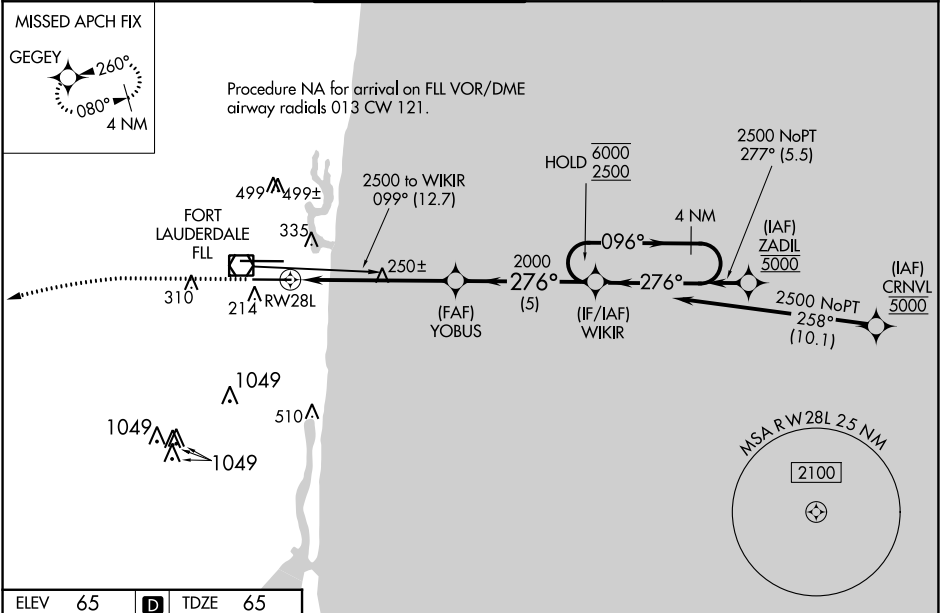

ELEV 65	D	TDZE 65
---------	----------	---------

101L 66 TWR 194 8000 X 150 8000 X 150 0.4% UP 0.4% DOWN 276° 1.2 NM to RW28L RW28L YOBUS 2000 WIKIR 4 NM Holding Pattern 096° 6000 276° 2500 GP 3.00° TCH 53	1000	3000	GEGEY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).	
	CATEGORY	A	B	C	D
	LPV DA	265/40		200 (200-¾)	
	LNAV/VNAV DA	459/45		394 (400-⅞)	
	LNAV MDA	500/40	435 (500-¾)		500/50 435 (500-1)
	CIRCLING	680-1	615 (700-1)		800-2 735 (800-2) 800-2¼ 735 (800-2¼)

SE-3, 11 JUL 2024 to 08 AUG 2024

SE-3, 11 JUL 2024 to 08 AUG 2024