

ILS or LOC RWY 3

LOC/DME I-NTD 109.3 Chan 30	APCH CRS 032°	Rwy Idg 11,102 TDZE 10 Arpt Elev 13
---	-------------------------	--

[USN]

POINT MUGU NAS (NAVAL BASE VENTURA CO) (KNTD)

DME or RADAR required.


T * When ALS inop, increase vis to 1 mile.
 ** Circling not authorized SE of Rwy 3-21.
 CAT A remain within 1.3 NM, CAT B remain within 1.5 NM,
 CAT C remain within 1.7 NM, CAT D remain within 2.3 NM.

SALSF

MISSED APPROACH: Climb to 500, then climbing left turn to 2600 on heading 181° and NTD TACAN R-211 to HALTU and hold.

ATIS ★	APP CON	TOWER ★	GND CON	ASR/ PAR
125.55 363.05	128.65 307.275	124.85 290.375	121.6 360.2	

ILS glideslope not useable beyond 8 NM.

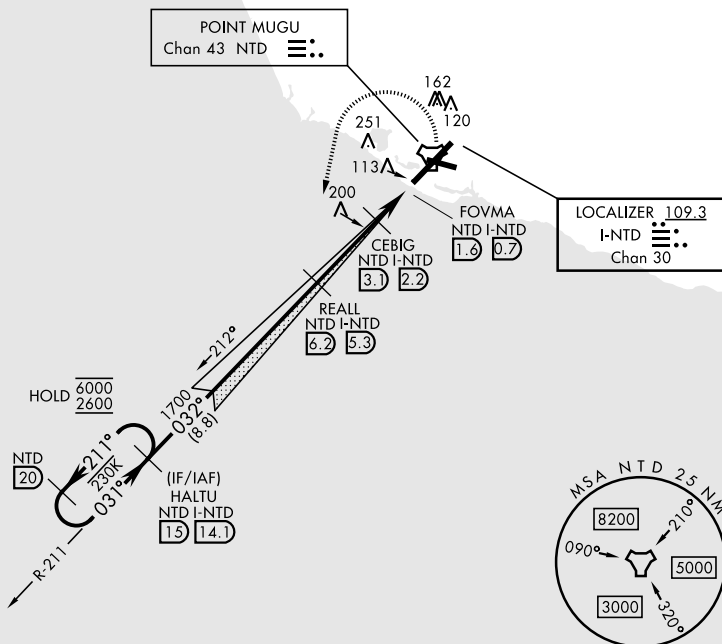

EMERG SAFE ALT 100 NM 12,300

Plan View Details:

- NTD 20:** 6000, 2600
- HALTU I-NTD 15, 14.1:** 211°, 031°, 032°
- REALL I-NTD 6.2, 5.3:** 1700, 680
- CEBIG NTD I-NTD 3.1, 2.2:** 3.00° TCH 46
- FOVMA NTD I-NTD 2.1, 1.2:** 1.6, 0.7
- Distances:** 3.2 NM, 1.5 NM, 0.5 NM

CATEGORY	A	B	C	D	E
S-ILS 3	210-¾		200	(200-¾)	
S-LOC 3*	380-¾		370	(400-¾)	
CIRCLING**	420-1 407 (500-1)	520-1 507 (600-1)	520-1½ 507 (600-1½)	580-2 567 (600-2)	NOT AUTHORIZED

Profile View Details:

- ELEV 13**
- TDZE 13**
- 3.2 NM** (Climb)
- 1.5 NM** (Descent)
- 0.5 NM** (Final Approach)
- 11, 192 x 200**
- 5502 x 200**
- TWR**
- 032°**
- HIRL all rwy**

OXNARD, CALIFORNIA

34° 07' N - 119° 07' W

POINT MUGU NAS (NAVAL BASE VENTURA CO) KNTD

Orig 27NOV25

PANS-OPS

ILS or LOC RWY 3