
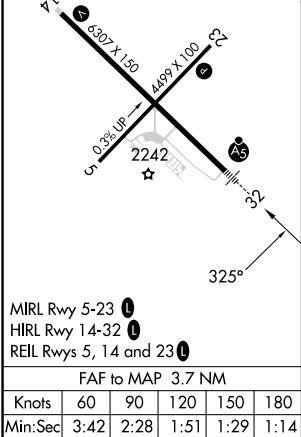


|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-BFD | APP CRS | Rwy Idg  | 6306 |
| 108.3     | 325°    | TDZE     | 2120 |
|           |         | Apt Elev | 2143 |

ILS or LOC RWY 32  
BRADFORD RGNL (BFD)

|                                                                                                                                  |       |                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------|
| DME required                                                                                                                     | MALSR | MISSED APPROACH: Climb to 2600 then climbing left turn to 4500 on heading 310° and on JHW VOR/DME R-146 to KONBE/JHW 20.2 DME and hold. |
| NA Inop table does not apply to S-ILS 32 and S-LOC 32 Cats A and B. For inop ALS, increase S-LOC 32 Cat C/D visibility to 1½ SM. | AS    |                                                                                                                                         |

|                 |                                    |                            |
|-----------------|------------------------------------|----------------------------|
| ASOS<br>133.825 | CLEVELAND CENTER<br>124.325 353.85 | UNICOM<br>123.075 (CTAF) 0 |
|-----------------|------------------------------------|----------------------------|

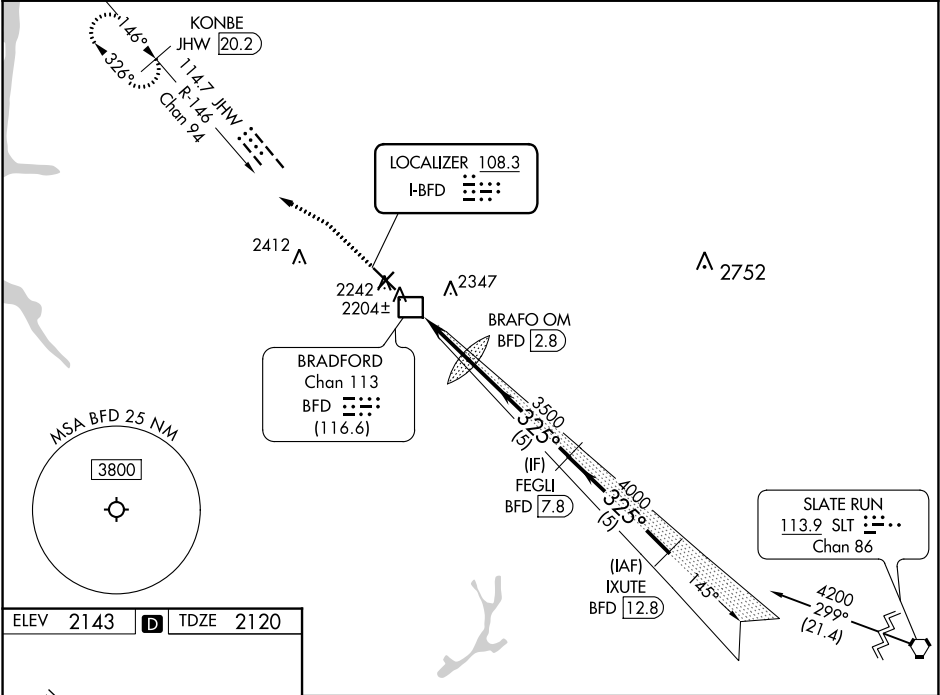

|          |                       |                       |                         |                       |                 |  |  |  |
|----------|-----------------------|-----------------------|-------------------------|-----------------------|-----------------|--|--|--|
|          | 2600                  | 4500                  | JHW R-146               | KONBE JHW 20.2        |                 |  |  |  |
|          | hdg 310°              |                       |                         |                       |                 |  |  |  |
|          | BFD 0.9               | BRAFO OM BFD 2.8      | FEGLI BFD 7.8           | IXUTE BFD 12.8        | GS 3.00° TCH 52 |  |  |  |
|          | 3.7 NM                | 5 NM                  | 5 NM                    |                       |                 |  |  |  |
| CATEGORY | A                     | B                     | C                       | D                     |                 |  |  |  |
| S-ILS 32 |                       | 2370-1                | 250 (300-1)             |                       |                 |  |  |  |
| S-LOC 32 |                       | 2480-1                | 360 (400-1)             |                       |                 |  |  |  |
| CIRCLING | 2600-1<br>457 (500-1) | 2620-1<br>477 (500-1) | 2720-1½<br>577 (600-1½) | 2760-2<br>617 (700-2) |                 |  |  |  |