

WAAS CH 40009 W24A	APP CRS 236°	Rwy Idg TDZE Apt Elev	9002 66 66
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 24

FRANCIS S GABRESKI (F'OK)

⚠


⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shirley altimeter setting: increase LPV DA to 293 feet; increase LNAV/VNAV DA to 632 feet and all Cats visibility 1/8 SM; increase all MDAs 40 feet and Circling Cat C visibility 1/4 SM. Baro-VNAV and VDP NA when using Shirley altimeter setting. Circling Rwy 15 NA at night.

MALSRL

MISSED APPROACH: Climb to 2600 direct ZATBO and hold.

ASOS 119.925	NEW YORK APP CON 125.975 343.65	SUFFOLK COUNTY TOWER ★ 125.3 (CTAF) 0 236.6	GND CON 121.8 225.4
------------------------	---	---	-------------------------------

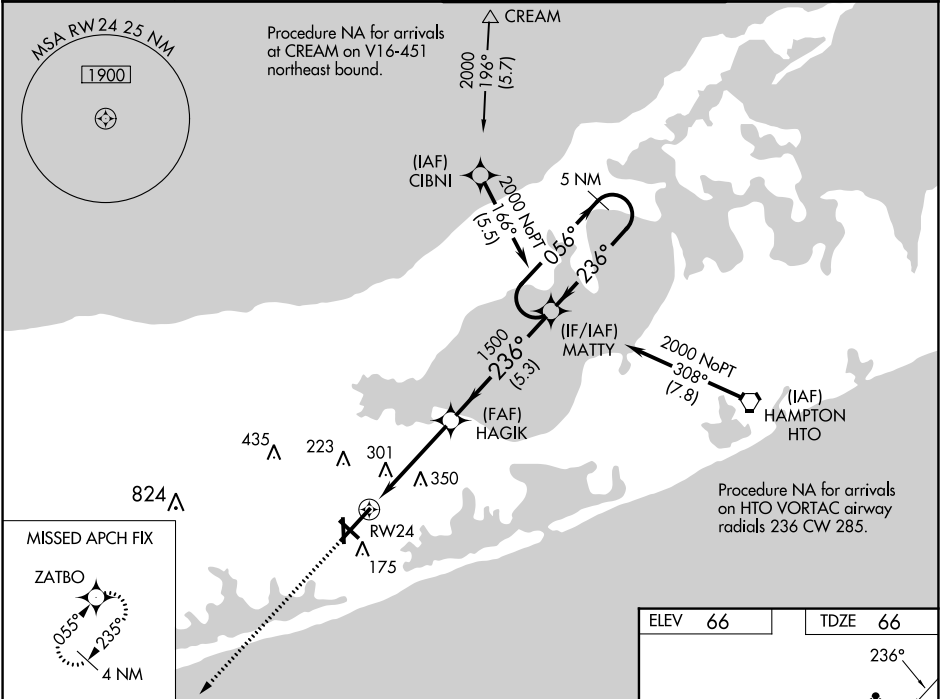

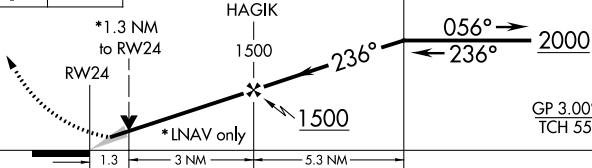2600	ZATBO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).			
		5 NM Holding Pattern			
					
CATEGORY	A	B	C	D	
LPV DA	266-½		200 (200-½)		
LNAV/ VNAV	DA	605-1⅓		539 (600-1⅓)	
LNAV MDA	560-½ 494 (500-½)		560-1		494 (500-1)
CIRCLING	600-1 534 (600-1)	620-1 554 (600-1)	700-1¾ 634 (700-1¾)	740-2¼ 674 (700-2¼)	

