

LOC I-EAF 109.9	APCH CRS 325°	Rwy ldg 14,529 TDZE 548 Arprt Elev 548
---------------------------	-------------------------	---

[USAF]

EIELSON AFB (PAEI)

ATC or RADAR HRDNG to BOGIE. DME required.


▲ * When ALS inop, increase RVR to 40 and vis to ¼ mile.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1½ mile.



MISSED APPROACH: Climb to 1000, then climbing left turn on EIL R-254 to 4000 to WAKOV and hold. Continue climb in hold.


ATIS ★ 119.9 273.5	FAIRBANKS APP CON 127.1 251.1 360° - 179° 125.35 363.2 180° - 359°	TOWER ★ 127.2 352.05	GND CON 121.8 275.8
------------------------------	--	--------------------------------	-------------------------------

*** Circling not authorized E of Rwy 14-32.
Missed approach requires the use of RNAV or ATC RADAR monitoring.
CAUTION: Uncontrolled airspace below 700 AGL outside EIL Class D.

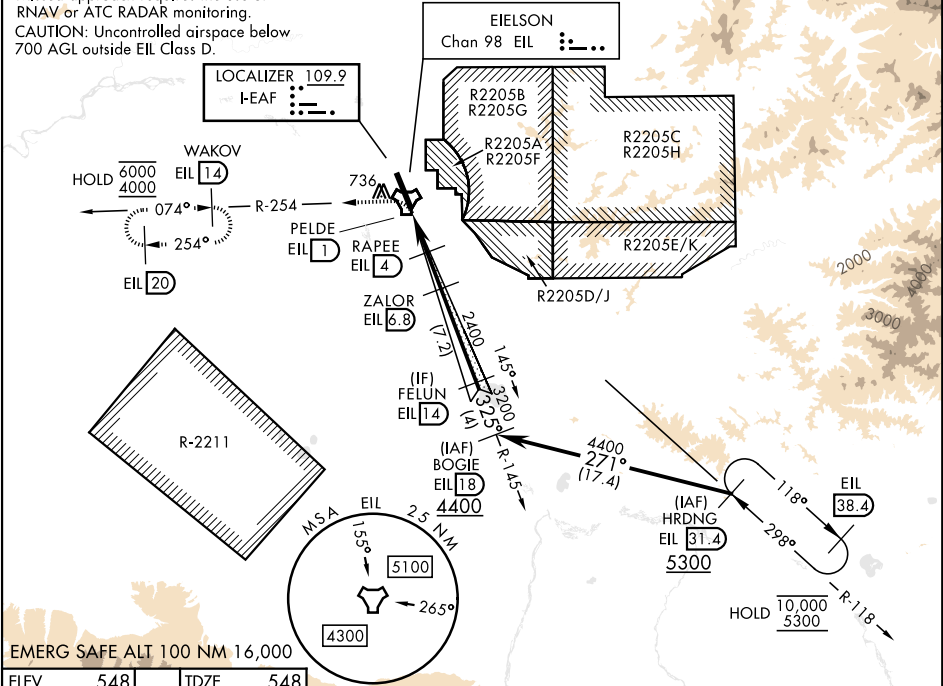


EMERG SAFE ALT 100 NM 16,000

ELEV 548	TDZE 548
-----------------	-----------------



FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

VGSI and ILS glidepath not coincident (VGSI angle 2.70/TCH 44).

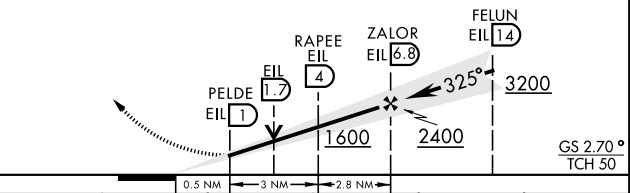

CATEGORY	A	B	C	D	E
S-ILS 32*	748/24 200 (200-½)				
S-LOC 32**	960/24 412 (500-½) 960/40 412 (500-¾)				
CIRCLING ***	1000-1 452 (500-1)	1040-1 492 (500-1)	1040-1½ 492 (500-1½)	1280-2¼ 732 (800-2¼)	1280-2½ 732 (800-2½)