ILS or LOC RWY 27

ESLER RGNL (ESF)

LOC/DME I-ESF	APP CRS	Rwy Ldg	5998
111.5	270°	TDZE	92
Chan 52		Apt Elev	112


DME or RADAR required.

T A Circling to Rwy 14-32 NA at night. VDP NA when using AEX altimeter setting. When local altimeter setting not received, use AEX altimeter setting and increase S-ILS 27 DA to 329 feet; increase all MDAs 40 feet and S-LOC 27 visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM.


MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 120° and on AEX VORTAC R-067 to LARTO INT/AEX 24.1 DME/RADAR and hold.

ASOS	MAKS APP CON	UNICOM
119.425	125.4 254.8	122.8 (CTAF) L

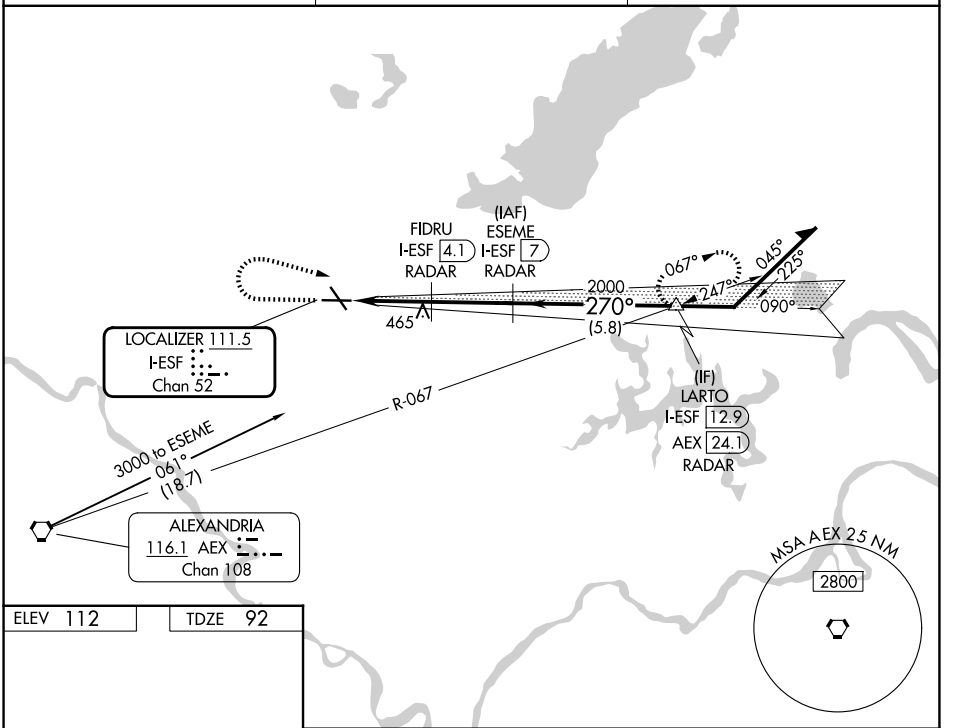


ELEV 112	TDZE 92



REIL Rwys 9, 14 and 32 L
MIRL Rwy 14-32 L
HIRL Rwy 9-27 L

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

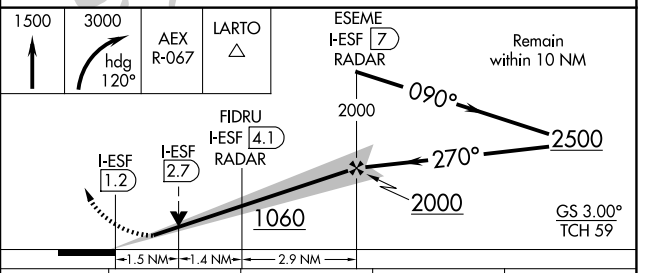

CATEGORY	A	B	C	D
S-ILS 27	292-½ 200 (200-½)			
S-LOC 27	620-½ 528 (600-½)		620-1 528 (600-1)	
CIRCLING	620-1 508 (600-1)		780-1¾ 668 (700-1¾)	780-2 688 (700-2)

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026