
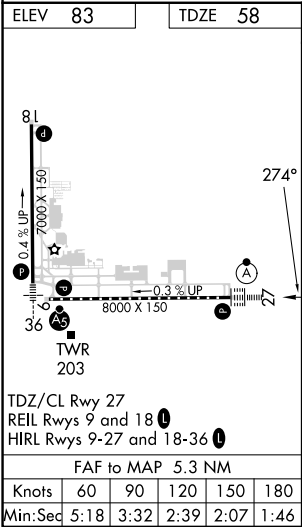


|                |             |          |           |
|----------------|-------------|----------|-----------|
| LOC/DME I-PLQ  | APP CRS     | Rwy Idg  | 8000      |
| <b>111.9</b>   | <b>274°</b> | TDZE     | <b>58</b> |
| Chan <b>56</b> |             | Apt Elev | <b>83</b> |

ILS or LOC RWY 27

TALLAHASSEE INTL (TLH)

|                                                                                                                                                                                            |                       |                      |                                                                                             |                                                                                                                                                                             |         |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--|
| DME required.                                                                                                                                                                              |                       |                      | ALSf-2<br> | MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 092° and on SZW VORTAC R-140 to GACED INT/SZW 12.4 DME and hold, continue climb-in-hold to 4000. |         |  |
| For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cats C, D and E visibility to 2 SM. SPADD FIX MINIMUMS increase S-LOC 27 Cats C, D and E visibility to RVR 5500. |                       |                      |                                                                                             |                                                                                                                                                                             |         |  |
| <br>ASR                                                                                                     |                       |                      |                                                                                             |                                                                                                                                                                             |         |  |
| ATIS                                                                                                                                                                                       | TALLAHASSEE APP CON ★ | TALLAHASSEE TOWER ★  | GND CON                                                                                     | CLNC DEL                                                                                                                                                                    | UNICOM  |  |
| 119.45 239.25                                                                                                                                                                              | 135.8 317.4           | 118.7 (CTAF) 0 257.8 | 121.9 348.6                                                                                 | 126.65 275.8                                                                                                                                                                | 123.075 |  |

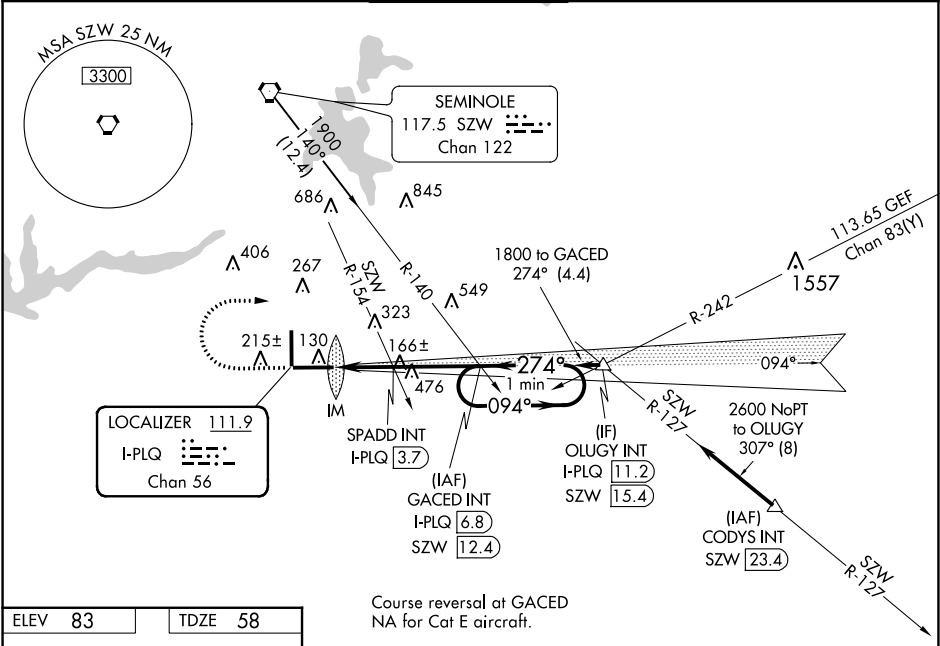

|          |  |                         |                              |                              |                              |                        |
|----------|--|-------------------------|------------------------------|------------------------------|------------------------------|------------------------|
| CATEGORY |  | A                       | B                            | C                            | D                            | E                      |
| S-ILS 27 |  | 258/18 200 (200-1/2)    |                              |                              |                              |                        |
| S-LOC 27 |  | 800/24<br>742 (800-1/2) | 800/40<br>742 (800-3/4)      | 800-1 3/4 742 (800-1 3/4)    |                              |                        |
| CIRCLING |  | 800-1<br>717 (800-1)    | 800-1 1/4<br>717 (800-1 1/4) | 800-2<br>717 (800-2)         | 800-2 1/4<br>717 (800-2 1/4) | 1000-3<br>917 (1000-3) |
|          |  | SPADD FIX MINIMUMS      |                              |                              |                              |                        |
| S-LOC 27 |  | 420/24                  | 362 (400-1/2)                | 420/35                       | 362 (400-3/4)                |                        |
| CIRCLING |  | 580-1<br>497 (500-1)    | 600-1<br>517 (600-1)         | 640-1 1/2<br>557 (600-1 1/2) | 800-2 1/4<br>717 (800-2 1/4) | 1000-3<br>917 (1000-3) |