
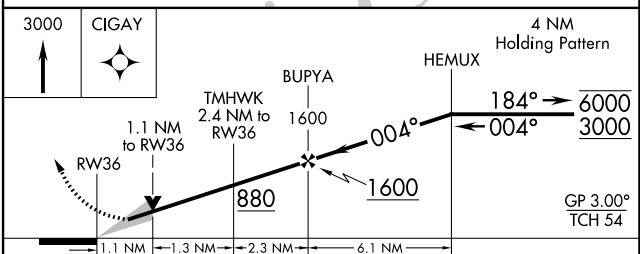
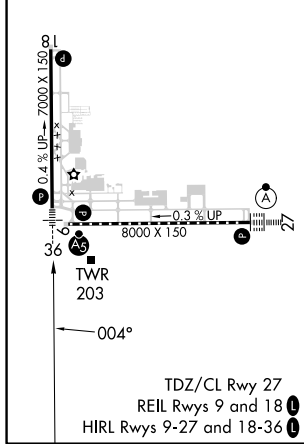


WAAS CH <b>60900</b> <b>W36A</b>	APP CRS <b>004°</b>	Rwy Idg <b>7000</b> TDZE <b>62</b> Apt Elev <b>83</b>
--	------------------------	---

# RNAV (GPS) RWY 36

TALLAHASSEE INTL (TLH)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.		
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.</p> <p>▲ For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.</p> <p>ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.</p>					
ATIS	TALLAHASSEE APP CON *	TALLAHASSEE TOWER *	GND CON	CLNC DEL	UNICOM
<b>119.45 239.25</b>	<b>135.8 317.4</b>	<b>118.7 (CTAF) 257.8</b>	<b>121.9 348.6</b>	<b>126.65 275.8</b>	<b>123.075</b>

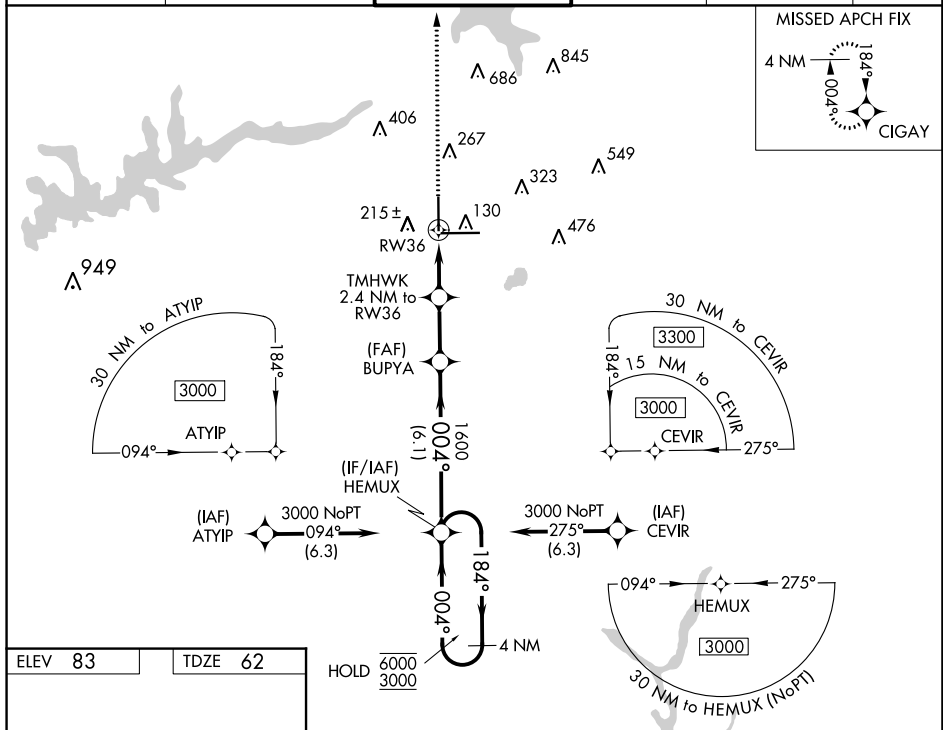

CATEGORY	A	B	C	D
LPV DA *	262/24		200 (200-½)	
LNAV/VNAV DA	364/24		302 (300-½)	
LNAV MDA	460/24 398 (400-½)		460/35 398 (400-½)	
<input checked="" type="checkbox"/> CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-½)	800-2¼ 717 (800-2¼)

SE-3, 31 OCT 2024 to 28 NOV 2024

SE-3, 31 OCT 2024 to 28 NOV 2024