

RNAV (GPS) RWY 12

APCH CRS	Rwy ldg
122°	10,000
	TDZE
	4344
	Arprt Elev
	4351

[USA]



MICHAEL AAF (KDPG)

NA * Obtain local altimeter setting on CTAF; when not received, use Wendover altimeter setting. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 4760 then climbing right turn to 8500 direct ETUBY and hold, continue climb in hold to 8500.
--	---

CLOVER CON 134.1 363.5	CTAF 126.2 270.3
--------------------------------------	--------------------------------

Procedure lies within R-6402A, PPR. (IAF) BONNEVILLE	Knots	60	120	180	240	300	360
	V/V(fpm)	337	674	1011	1348	1685	2022
	Min climb of 337 ft/NM to 6000 - Controlling Obstacle Unk						

 CEVAR

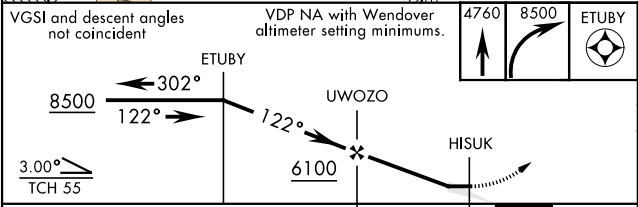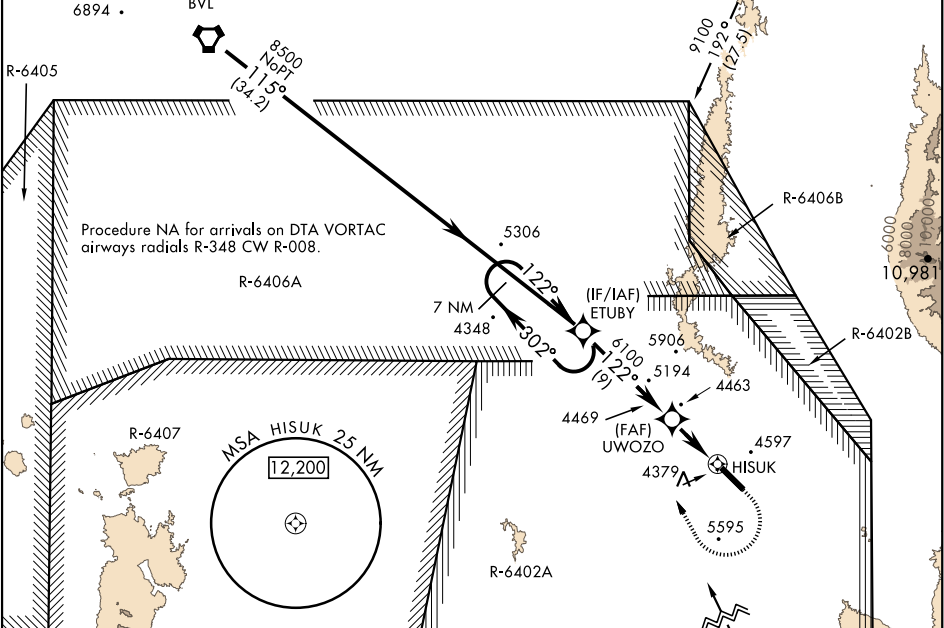

CATEGORY	A	B	C	D	E
LNAV MDA	4640-1 294 (300-1)	5140-2 794 (800-2 1/2)			
CIRCLING	4800-1 449 (500-1)	4920-1 569 (600-1)	5160-2 809 (900-2 1/2)	5880-3 1529 (1600-3)	NA
BELOW MINIMA REQUIRES MISSED APPROACH CLIMB GRADIENT OF 337 ft/NM					
LNAV MDA	NA	4640-1 294 (300-1)			
* WENDOVER ALTIMETER SETTING MINIMUMS					
LNAV MDA	4800-1 454 (500-1)	5300-3 954 (1000-3)			
CIRCLING	4960-1 609 (700-1)	5080-1 729 (800-1)	5320-3 969 (1000-3)	6040-3 1689 (1700-3)	NA
BELOW MINIMA REQUIRES MISSED APPROACH CLIMB GRADIENT OF 337 ft/NM					
LNAV MDA	NA	4800-3 454 (500-3)			

RNAV (GPS) RWY 12