

WAAS CH 50217 W27A	APP CRS 271°	Rwy Idg 6799 TDZE 1606 Apt Elev 1624
--	------------------------	---

RNAV (GPS) RWY 27


RHINELANDER/ONEIDA COUNTY (RHI)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Tomahawk altimeter setting: increase LPV DA to 1865 feet and visibility ¼ SM; increase LNAV/VNAV DA to 2042 feet and visibility ¼ SM; increase all MDAs 60 feet and visibility Cat C and D ¼ SM. Baro-VNAV and VDP NA when using Tomahawk altimeter setting.

MISSED APPROACH:
Climb to 4000 direct ECANA and hold.

ASOS 126.825	MINNEAPOLIS CENTER 133.65 281.5	UNICOM 123.0(CTAF) 0
------------------------	---	--------------------------------

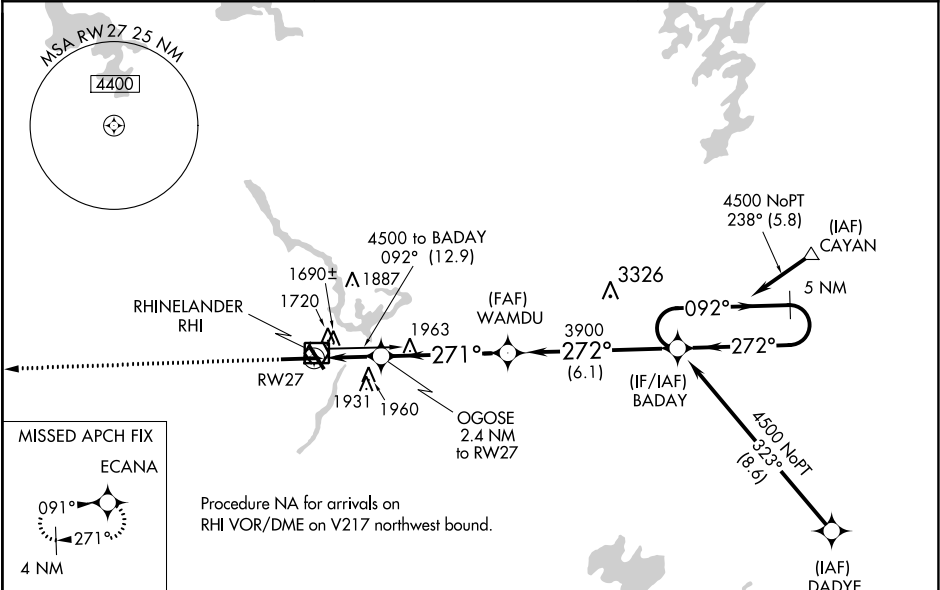

ELEV 1624	D	TDZE 1606
-----------	----------	-----------

271° to RW27

4000 ECANA

OGOSE 2.4 NM to RW27

* 1.7 NM to RW27

* 2420

3900

3900

271°

272°

092°

4500

5 NM Holding Pattern

GP 3.00° TCH 50

6800 X 150

0.4% UP

500

1659

33

HIRL Rwy 9-27 and 15-33 0
REIL Rwy 15, 27 and 33 0