ILS or LOC RWY 31
CHAN GURNEY MUNI (YKN)

LOC I-YKN	APP CRS	Rwy ldg	6094
109.5	317°	TDZE	1285
		Apt Elev	1306

RNP APCH - GPS.

DME required for LOC only. RADAR required for procedure entry.

T A NA Circling NA east of Rwy 20 and northeast of Rwy 31. DME from YKN DME. DME use requires simultaneous reception of I-YKN and YKN DME. For inop ALS, increase S-LOC 31 Cat C/D visibility to 2½ SM and increase ZIMUK fix minimums S-LOC 31 Cat C/D visibilitiy to ⅞ SM. * DME from YKN DME.

MALSR A5

MISSED APPROACH: Climb to 3500 direct YOTUS and hold, continue climb-in-hold to 3500.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
119.05	125.025 235.625	122.8 (CTAF) L

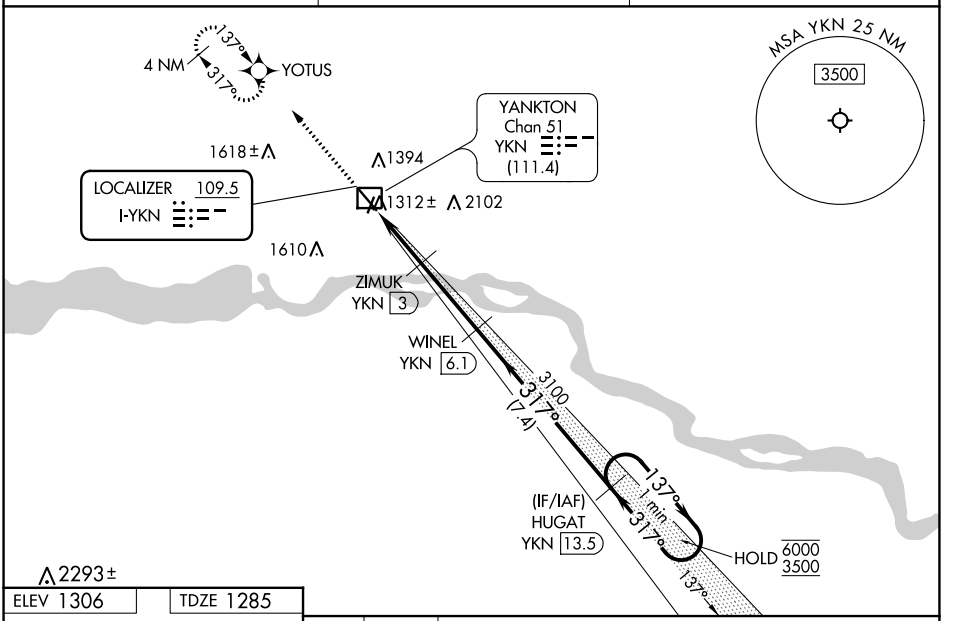

ELEV 1306	TDZE 1285

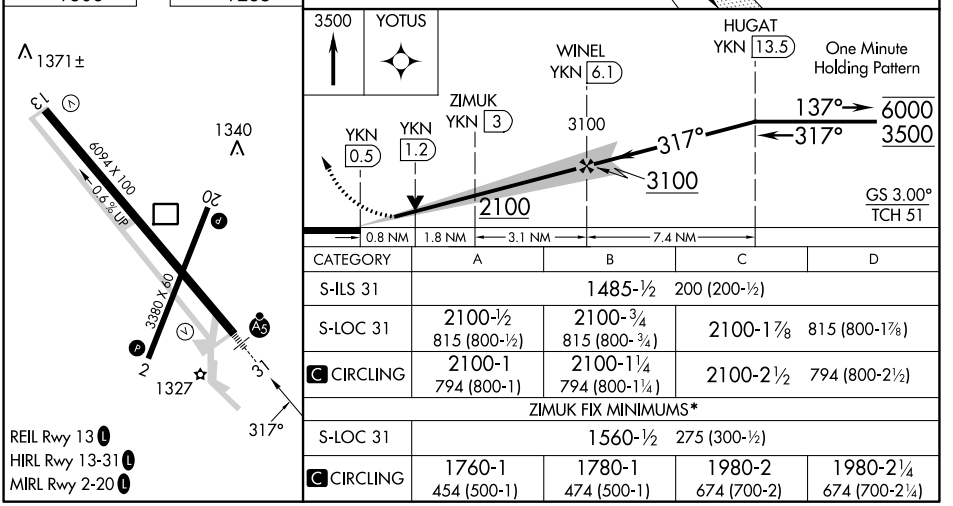

CATEGORY	A	B	C	D
S-ILS 31	1485-½ 200 (200-½)			
S-LOC 31	2100-½ 815 (800-½)	2100-¾ 815 (800-¾)	2100-1⅞ 815 (800-1⅞)	
C CIRCLING	2100-1 794 (800-1)	2100-1¼ 794 (800-1¼)	2100-2½ 794 (800-2½)	
ZIMUK FIX MINIMUMS*				
S-LOC 31	1560-½ 275 (300-½)			
C CIRCLING	1760-1 454 (500-1)	1780-1 474 (500-1)	1980-2 674 (700-2)	1980-2¼ 674 (700-2¼)