

LOC I-YKN

109.5

APP CRS

317°

Rwy Idg

6094

TDZE

1285

Apt Elev

1306

ILS or LOC RWY 31

CHAN GURNEY MUNI (YKN)

RNP APCH - GPS.

DME required for LOC only. RADAR required for procedure entry.

NA

Circling NA east of Rwy 20 and northeast of Rwy 31. DME from YKN DME. DME use requires simultaneous reception of I-YKN and YKN DME. For inop ALS, increase S-LOC 31 Cat C/D visibility to 2½ SM and increase ZIMUK fix minimums S-LOC 31 Cat C/D visibility to ¾ SM. * DME from YKN DME.

MALSR

MISSED APPROACH: Climb to 3500 direct YOTUS and hold, continue climb-in-hold to 3500.

AWOS-3PT


119.05

MINNEAPOLIS CENTER

125,025 235,625

UNICOM

122.8 (CTAF)

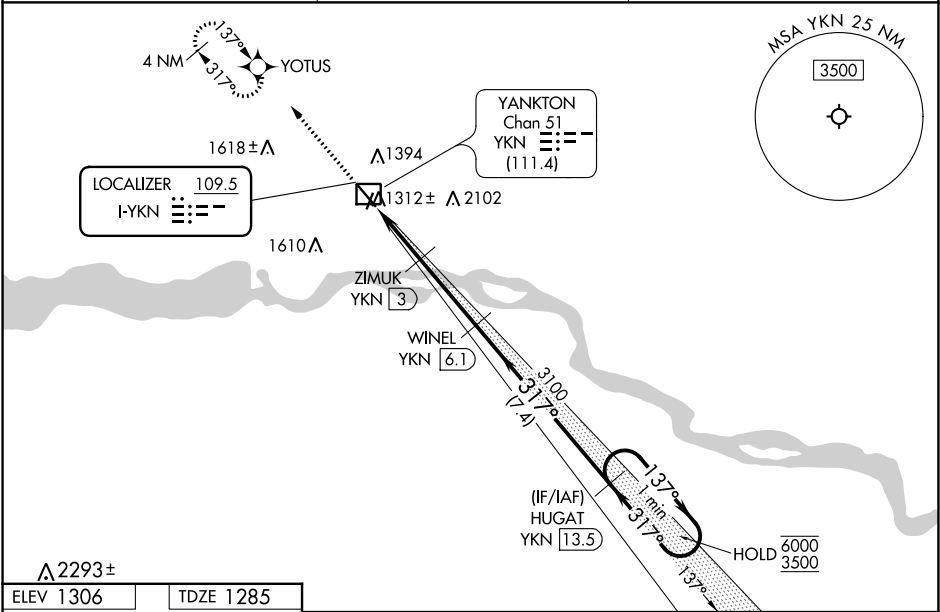

1371±

3500

YOTUS

WINEL YKN 6.1

HUGAT YKN 13.5

One Minute Holding Pattern

6000 3500

GS 3.00° TCH 51

YKN 0.5

YKN 1.2

ZIMUK YKN 3

3100

2100

0.8 NM

1.8 NM

3.1 NM

7.4 NM

CATEGORY	A	B	C	D
S-ILS 31	1485-½ 200 (200-½)			
S-LOC 31	2100-½ 815 (800-½)	2100-¾ 815 (800-¾)	2100-1⅞	815 (800-1⅞)
CIRCLING	2100-1 794 (800-1)	2100-1¼ 794 (800-1¼)	2100-2½	794 (800-2½)
ZIMUK FIX MINIMUMS*				
S-LOC 31	1560-½ 275 (300-½)			
CIRCLING	1760-1 454 (500-1)	1780-1 474 (500-1)	1980-2 674 (700-2)	1980-2¼ 674 (700-2¼)