

WAAS CH 87133 W30A	APP CRS 301°	Rwy Idg TDZE Apt Elev	5511 1338 1339
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30


SPENCER MUNI (SPW)

RNP APCH-GPS.


Baro-VNAV and VDP NA when using Estherville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Estherville altimeter setting: increase LPV DA to 1648 feet, LNAV/VNAV DA to 1683 feet and all visibilities 1/8 SM; increase all MDAs 60 feet and visibility Cats C and D 1/4 SM.

MISSED APPROACH: Climb to 4000 direct YAYDU and hold.


ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

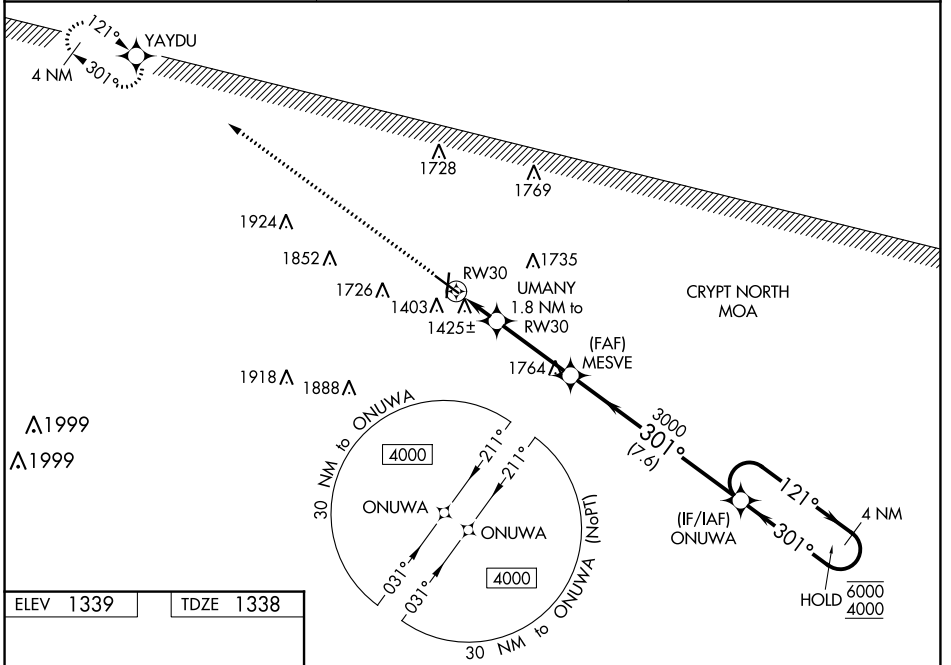

ELEV 1339	TDZE 1338
-----------	-----------

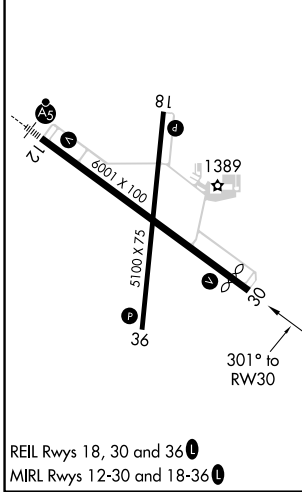

REIL Rwy 18, 30 and 36
MIRL Rwy 12-30 and 18-36

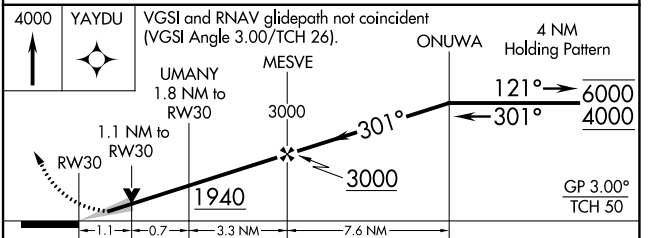

CATEGORY	A	B	C	D
LPV DA		1588-3/4	250 (300-3/4)	
LNAV/VNAV DA		1623-7/8	285 (300-7/8)	
LNAV MDA	1720-1	382 (400-1)	1720-1 1/8	382 (400-1 1/8)
C CIRCLING	1760-1 421 (500-1)	1800-1 461 (500-1)	2100-2 1/4 761 (800-2 1/4)	2100-2 1/2 761 (800-2 1/2)

NC-3, 31 OCT 2024 to 28 NOV 2024

NC-3, 31 OCT 2024 to 28 NOV 2024