
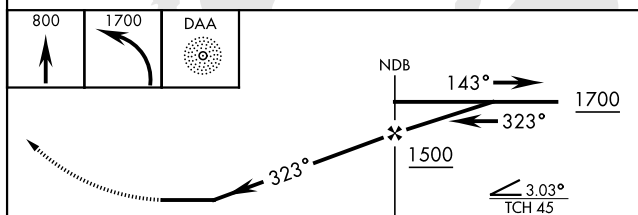



NDB DAA <u>223</u>	APCH CRS 323°	Rwy Idg 4529 TDZE 68 Arpt Elev 74	AL-5504 [USA]		DAVISON AAF (KDAV)	
▼ * When ALS inop, increase CAT D vis to 2 ¼ miles. ** If local altimeter setting not received, use Ronald Reagan Washington National altimeter setting.			MALSF 	MISSED APPROACH: Climb to 800 then climbing left turn to 1700 direct DAA NDB and hold.		
ATIS 128.175	POTOMAC APP CON 118.95 319.1	TOWER★ 124.275 (CTAF) 0 229.4		GND CON 121.9 351.8	CLNC DEL 351.8	PAR

505
Inoperative table does not apply to S-32 CAT A and B.

Visibility reduction by helicopters NA.

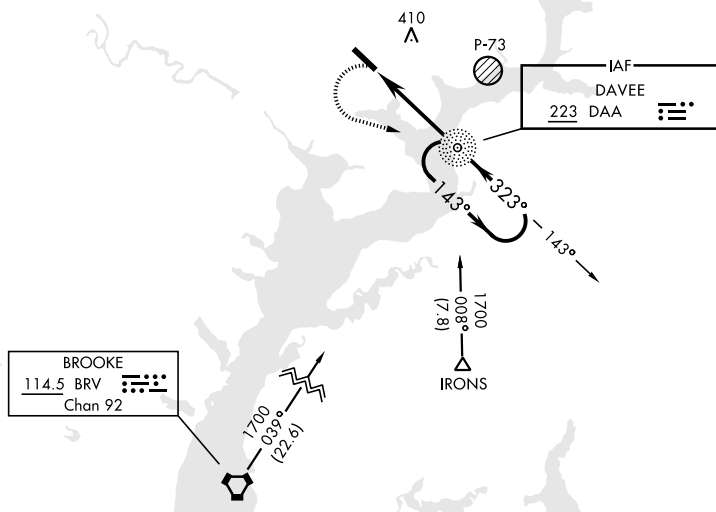

		4.3 NM			
CATEGORY	A		B	C	D
S-32 *	740/50	672 (700-1)		740-1 $\frac{3}{4}$ 672 (700-1 $\frac{3}{4}$)	740-2 672 (700-2)
CIRCLING	740-1	666 (700-1)		740-1 $\frac{3}{4}$ 666 (700-1 $\frac{3}{4}$)	760-2 $\frac{1}{4}$ 686 (700-2 $\frac{1}{4}$)
** RONALD REAGAN WASHINGTON NATIONAL ALTIMETER SETTING MINIMUMS					
S-32 *	780/50	712 (800-1)		780-1 $\frac{3}{4}$ 712 (800-1 $\frac{3}{4}$)	780-2 712 (800-2)
CIRCLING	780-1	706 (800-1)		780-1 $\frac{3}{4}$ 706 (800-1 $\frac{3}{4}$)	800-2 $\frac{1}{4}$ 726 (800-2 $\frac{1}{4}$)

