

WAAS CH 99313 W19A	APP CRS 190°	Rwy ldg 6604 TDZE 91 Apt Elev 91
--	------------------------	---



RNAV (GPS) RWY 19
H L SONNY CALLAHAN (CQF')


T Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).

A DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

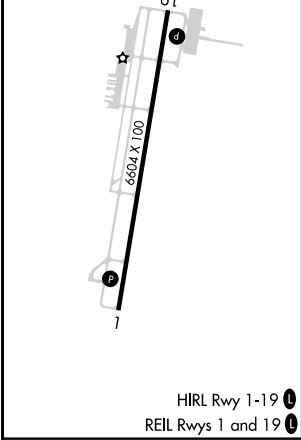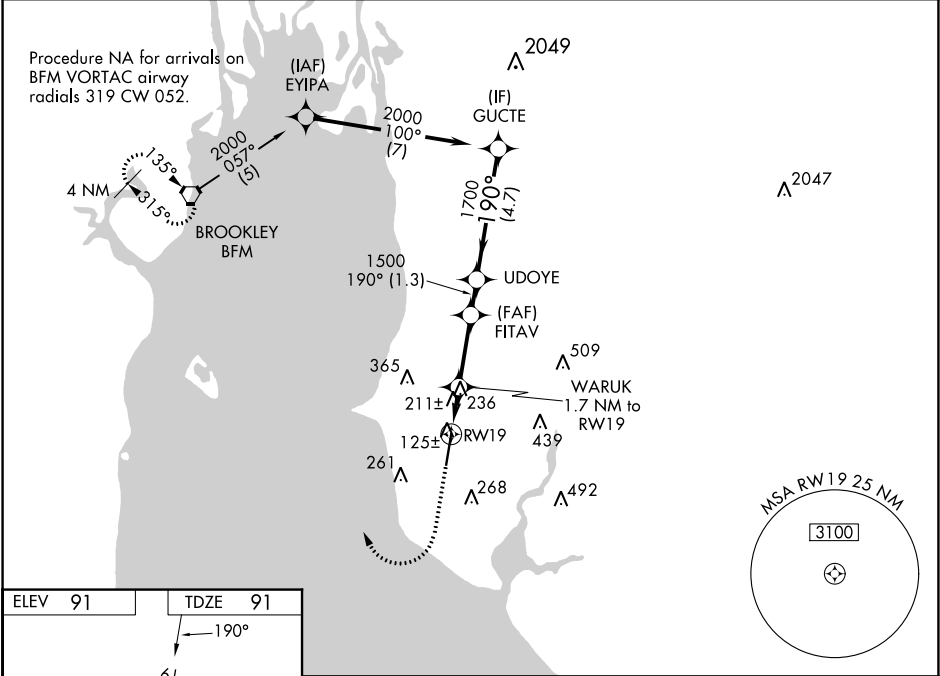

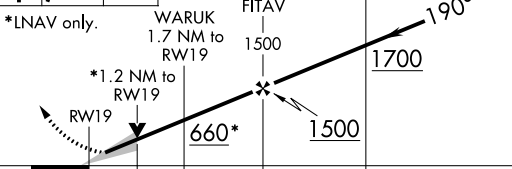1500	2000	BFM	GUCTE			
						2000
*LNAV only.		WARUK 1.7 NM to RW19	FITAV 1500	Procedure Turn NA		
1.2 NM to RW19		660	1500	GP 3.00° TCH 35		
1.2		0.5	2.6	1.3 NM	4.7 NM	
CATEGORY	A		B	C	D	
LPV DA			341-7⁄8	250 (300-7⁄8)		
LNAV/ VNAV DA			513-1½	422 (500-1½)		
LNAV MDA	500-1 409 (500-1)		500-1½ 409 (500-1½)			
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720-1¾ 629 (700-1¾)	740-2 649 (700-2)		

SE-4, 16 MAY 2024 to 13 JUN 2024

SE-4, 16 MAY 2024 to 13 JUN 2024