

WAAS CH 86801 W03A	APP CRS 026°	Rwy Idg 5502 TDZE 315 Apt Elev 315
--	------------------------	---



RNAV (GPS) RWY 3
SIKESTON MEML MUNI (SIK)

RNP APCH.


V Rwy 3 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV NA when using
A NA Cape Girardeau altimeter setting. For uncompensated Baro-VNAV systems, procedure
 NA below -15°C or above 54°C. When local altimeter setting not received, use
 Cape Girardeau altimeter setting and increase all DA 49 feet and all MDA 60 feet.
 Increase LNAV and Circling Cat C/D visibility $\frac{1}{2}$ SM.

MISSED APPROACH: Climb to 2200 direct IBEFY and hold.

AWOS-3 119.175	MEMPHIS CENTER 133.65 292.15	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

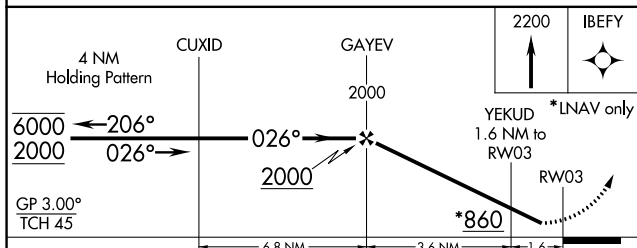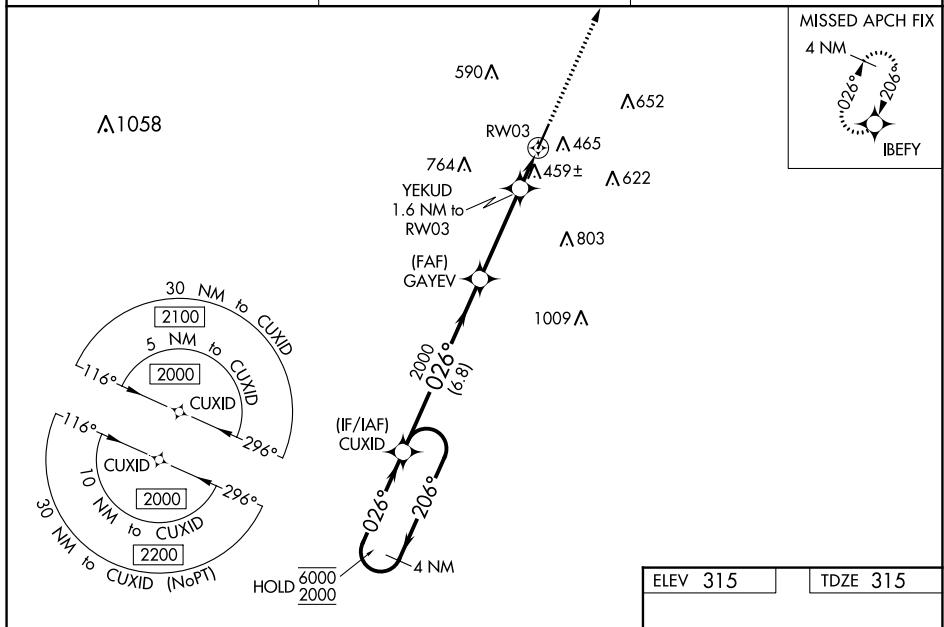

CATEGORY		A		B		C		D	
LPV	DA	629-1 314 (400-1)							
LNAV/ VNAV	DA	769-1 $\frac{3}{8}$ 454 (500-1 $\frac{1}{8}$)							
LNAV	MDA	720-1 405 (500-1)				720-1 $\frac{1}{8}$ 405 (500-1 $\frac{1}{8}$)			
 CIRCLING		840-1 525 (600-1)		860-1 545 (600-1)		1080-2 $\frac{1}{4}$ 765 (800-2 $\frac{1}{4}$)		1160-2 $\frac{3}{4}$ 845 (900-2 $\frac{3}{4}$)	

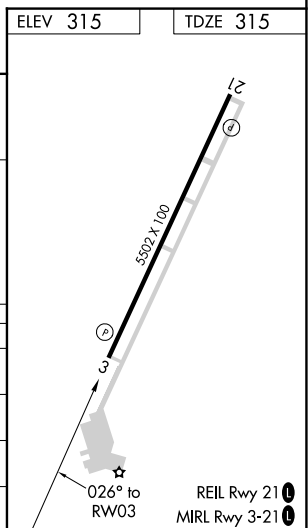

SIKESTON, MISSOURI
Amdt 2 08NOV18

36°54'N-89°34'W

SIKESTON MEML MUNI (SIK)
RNAV (GPS) RWY 3

NC-3, 18 APR 2024 to 16 MAY 2024

NC-3, 18 APR 2024 to 16 MAY 2024