

WAAS CH 45836 W22A	APP CRS 223°	Rwy Idg TDZE Apt Elev	4504 90 92
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 22

MARION COUNTY (MAO)


⚠

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 53 feet and all visibilities ¼ mile, increase all MDA 60 feet and all Cat C/D visibilities ¼ mile.

MISSED APPROACH:

Climb to 2000 direct OCAGI and hold.

AWOS-3 119.875	FLORENCE APP CON ★ 135.25 316.15	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

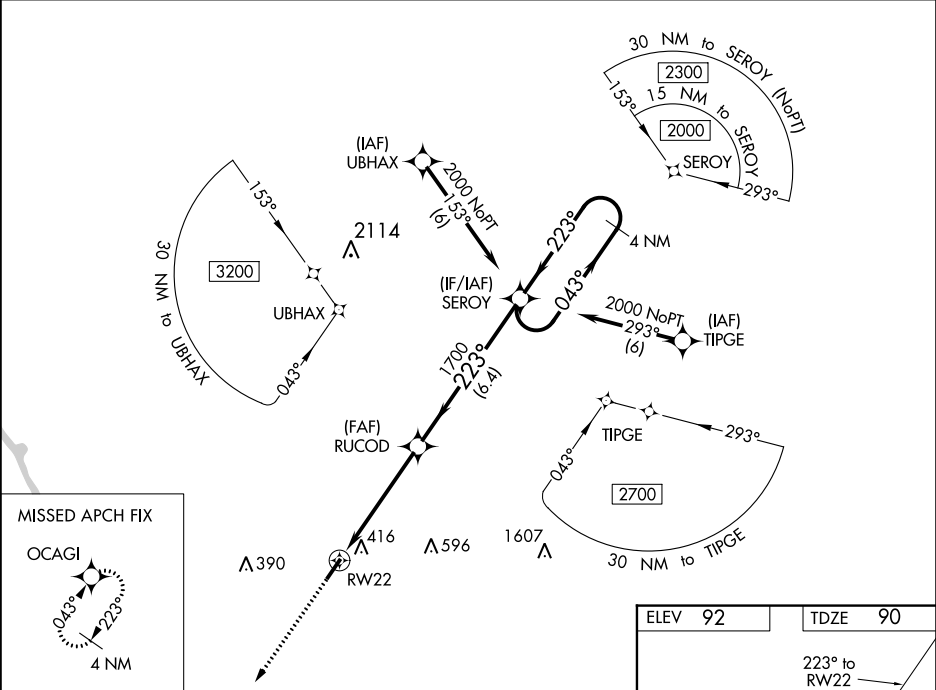

2000	OCAGI				
		RUCOD	SEROY	4 NM Holding Pattern	
		1700	223°	043°	2000
			223°		
		RW22	1700		GP 3.00° TCH 39
		4.9 NM	6.4 NM		
CATEGORY	A	B	C	D	
LPV DA		396-1	306 (400-1)		
LNAV/ VNAV DA		577-1½	487 (500-1½)		
LNAV MDA	680-1	590 (600-1)	680-1¾	590 (600-1¾)	
CIRCLING	720-1	628 (700-1)	720-1¾ 628 (700-1¾)	960-2¾ 868 (900-2¾)	

