

WAAS CH 72811 W18A	APP CRS 180°	Rwy Idg 5005 TDZE 338 Apt Elev 363
--	------------------------	---


RNAV (GPS) RWY 18

HUNTSVILLE MUNI (UTS)


▼ Baro-VNAV NA when using Conroe/North Houston Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Conroe/North Houston Rgnl altimeter setting. When local altimeter setting not received, use Conroe/North Houston Rgnl altimeter setting and increase all DA 75 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cts and Circling Ctr C visibility ¼ mile.

MISSED APPROACH: Climb to 4000 direct HINET and right turn via track 297° to OSCER and hold.

ASOS 119.425	HOUSTON CENTER 134.8 269.6	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

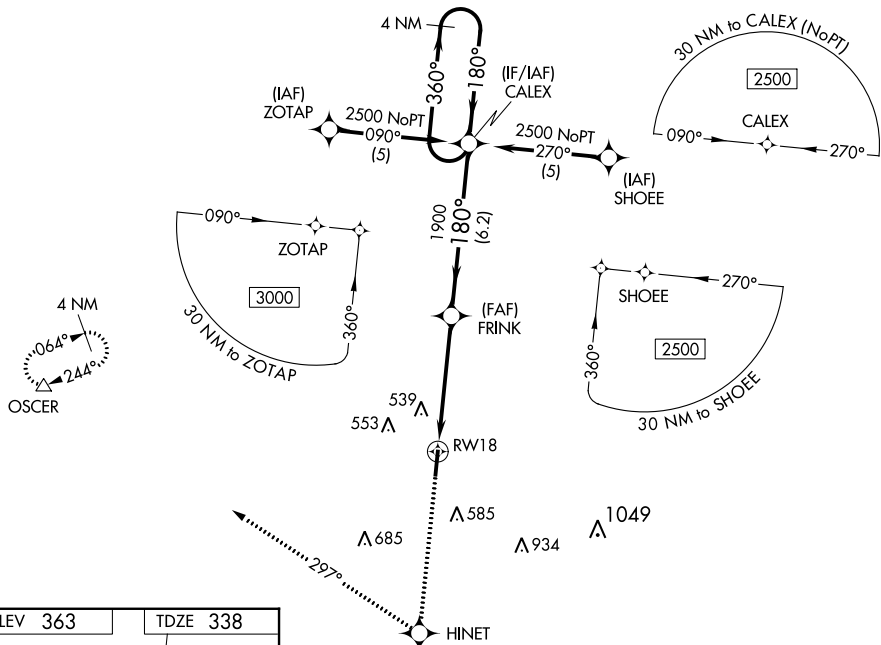

ELEV 363	TDZE 338
----------	----------



4000 HINET OSCER

↑ tr 297° △

*LNAV only.

CALEX 4 NM Holding Pattern

FRINK

RW18

*1.4 NM to RW18

180°

360° →

← 180°

2500

GP 3.00°

TCH 40°

1.4 NM 3.4 NM 6.2 NM

CATEGORY	A	B	C	D
LPV DA	588-1	250 (300-1)		NA
LNAV/VNAV	886-2	548 (600-2)		NA
LNAV MDA	840-1	502 (500-1)	840-1½ 502 (500-1½)	NA
CIRCLING	920-1	557 (600-1)	1120-2¼ 757 (800-2¼)	NA