

MAYNR TWO DEPARTURE (RNAV)

**TOP ALTITUDE:
ASSIGNED BY ATC**



RNAV1 - DME/DME/IRU or GPS.

From SLIPT to MAXIM: RNAV 1 - GPS.

From SLIPT to CANOA: RNAV 1 - GPS.

RADAR required.

MIAMI DEP CON
126.05 251.1

ATIS

120.55

GND CON

121.9


POMPANO BEACH TOWER★
1254 (CTAE)

25.4 CIAF

TAKEOFF MINIMUMS
Rwys 6, 10, 15, 24, 28, 33: Standard with minimum climb of 500'/NM to 520.

NOTE: Jet aircraft only.

NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

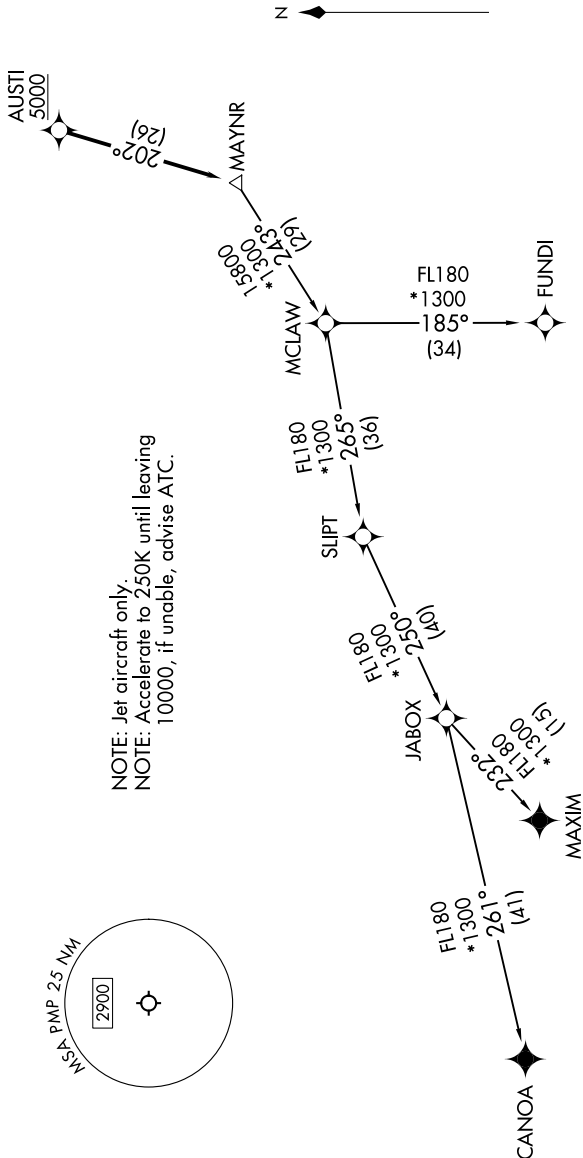

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)