RNAV (RNP) Z RWY 31R

DALLAS-FORT WORTH INTL (DFW)

APP CRS	Rwy Idg	8373
311°	TDZE	523
	Apt Elev	607

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). For inop MALSR, increase RNP 0.14 all Cats visibility to RVR 5100, RNP 0.23 all Cats visibility to 1⅜ mile, RNP 0.30 all Cats visibility to 1½ mile. Simultaneous approach authorized with Rwy 31L. GPS Required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SOLDO and hold.

D-ATIS	REGIONAL APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	135.5 125.2	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25	

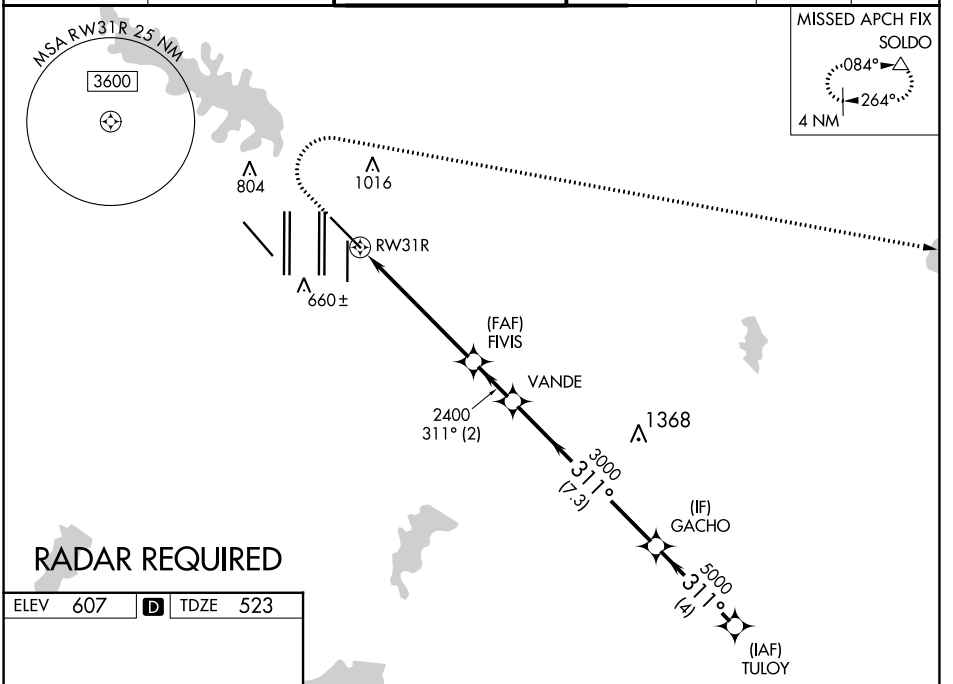

RADAR REQUIRED

ELEV 607	D	TDZE 523



HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

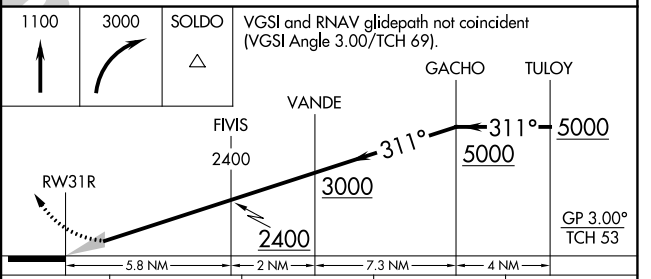

CATEGORY	A	B	C	D
RNP 0.14 DA		838/27	315 (300-⅝)	
RNP 0.23 DA		928/44	405 (400-⅞)	
RNP 0.30 DA		987/55	464 (400-1)	

AUTHORIZATION REQUIRED

SC-2, 11 JUL 2024 to 08 AUG 2024
SC-2, 11 JUL 2024 to 08 AUG 2024