

WAAS  
CH **40423**  
**W12A**

APP CRS  
**126°**

Rwy Idg  
TDZE  
Apt Elev


**5704**  
**2458**  
**2458**

**RNAV (GPS) RWY 12**  
DAWSON COMMUNITY (GDV)

RNP APCH.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 28°C. When local altimeter setting not received, procedure NA. Rwy 12 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 6000 direct ZORAS and on track 060° to YAFLU and hold, continue climb-in-hold to 6000.

|                            |                                         |                                 |
|----------------------------|-----------------------------------------|---------------------------------|
| AWOS-3PT<br><b>135.075</b> | SALT LAKE CENTER<br><b>126.85 305.2</b> | UNICOM<br><b>122.8 (CTAF) 1</b> |
|----------------------------|-----------------------------------------|---------------------------------|

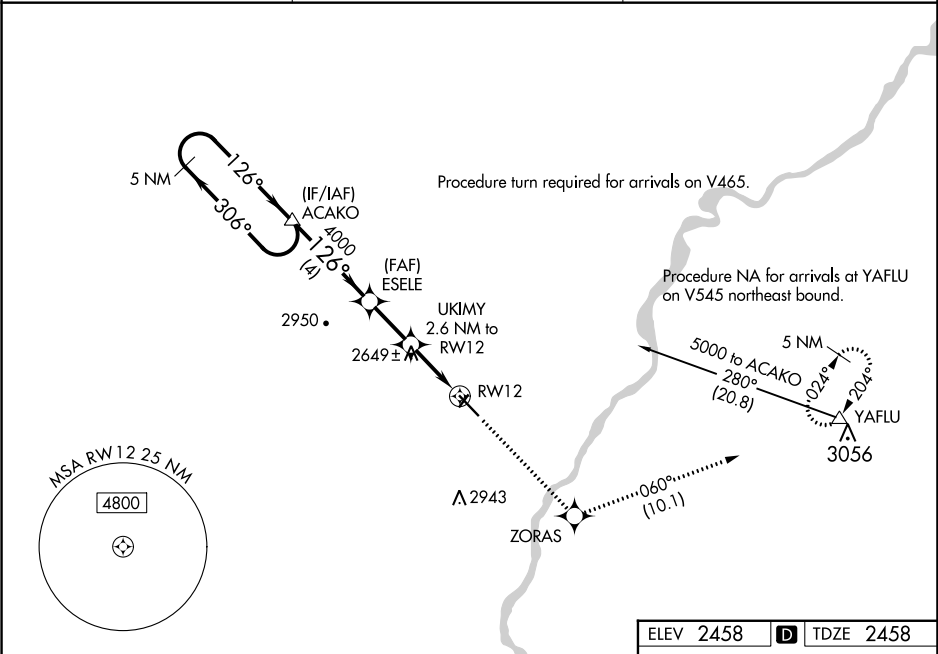

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37).

5 NM Holding Pattern  
ACAKO  
5000  
306°  
126°  
GP 3.00°  
TCH 52

6000  
ZORAS  
YAFLU  
tr 060°  
\*LNAV only

ESELE  
4000  
UKIMY 2.6 NM to RW12  
RW12  
\*3320  
4 NM  
2.1 NM  
2.6 NM

REIL Rwy 12 and 30 1  
MIRL Rwy 2-20 and 12-30 1

| CATEGORY     | A                  | B                  | C                          | D                          |
|--------------|--------------------|--------------------|----------------------------|----------------------------|
| LPV DA       | 2708-1 250 (300-1) |                    |                            |                            |
| LNAV/VNAV DA | 2708-1 250 (300-1) |                    |                            |                            |
| LNAV MDA     | 2900-1 442 (500-1) |                    | 2900-1 3/8 442 (500-1 3/8) |                            |
| CIRCLING     | 2900-1 442 (500-1) | 2920-1 462 (500-1) | 3280-2 1/2 822 (900-2 1/2) | 3280-2 3/4 822 (900-2 3/4) |