


WAAS CH 58342 W06A	APP CRS 058°	Rwy Idg TDZE 3548 Apt Elev 3548
--	------------------------	---

RNAV (GPS) RWY 6

CONRAD (S01)

RNP APCH. NA Circling NA to Rwys 15 and 33. Rwy 6 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 53°C. Use Cut Bank altimeter setting.		MISSED APPROACH: Climb to 4500, then climbing right turn to 7000 direct PENRY and hold, continue climb in hold to 7000.
CTB ASOS 119.025	SALT LAKE CITY CENTER 133.4 285.4	AUNICOM 122.8 (CTAF) 0

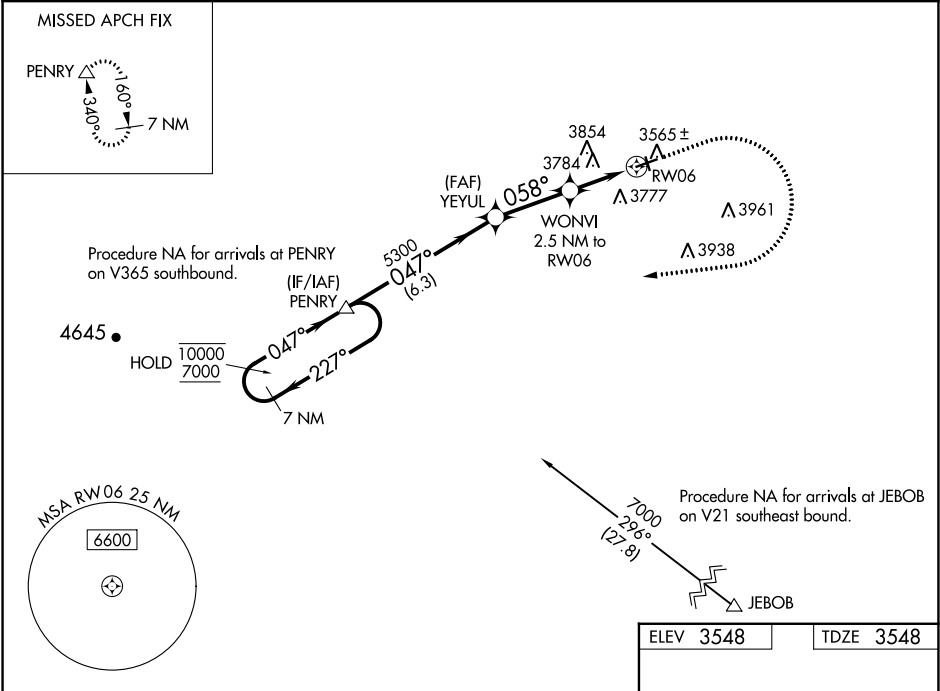

7 NM Holding Pattern		PENRY	YEYUL	4500	7000	PENRY
10000 ← 227°		047° →	047°	5300	WONVI 2.5 NM to RW06	* LNAV only.
GP 3.00° TCH 45		5300	058°	*4400	RW06	
6.3 NM		2.8 NM	2.5 NM			
CATEGORY	A	B	C	D		
LPV DA	3915-1		367 (400-1)			
LNAV/ VNAV DA	4266-2		718 (800-2)			
LNAV MDA	4220-1	672 (700-1)	4220-1 7/8	672 (700-1 1/8)		
CIRCLING	4220-1 672 (700-1)	4340-1 792 (800-1)	4460-2 3/4 912 (1000-2 3/4)	4620-3 1072 (1100-3)		

MIRL Rwy 6-24 0

REIL Rwy 24 0