

WAAS CH <b>48805</b> <b>W36A</b>	APP CRS <b>001°</b>	Rwy Idg <b>5501</b> TDZE <b>997</b> Apt Elev <b>1004</b>
--	------------------------	--





# RNAV (GPS) RWY 36

LEE'S SUMMIT MUNI (LXT)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Rwy 36 helicopter visibility reduction below 3/4 SM NA.  
**⚠** DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Charles B. Wheeler Downtown altimeter setting. When local altimeter setting not received, use Charles B. Wheeler Downtown altimeter setting: increase LPV DA to 1374 feet and all visibilities 1/8 SM; increase LNAV/VNAV to 1367 feet and all visibilities 1/8 SM; increase all MDA 80 feet and LNAV visibility Cats C and D 1/8 SM, Circling Cats C and D 1/2 SM.

MISSED APPROACH: Climb to 3000 direct SOXOE and hold.

ASOS <b>124.175</b>	KANSAS CITY APP CON <b>118.4 307.35</b>	CLNC DEL <b>118.45</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>
------------------------	--	---------------------------	--

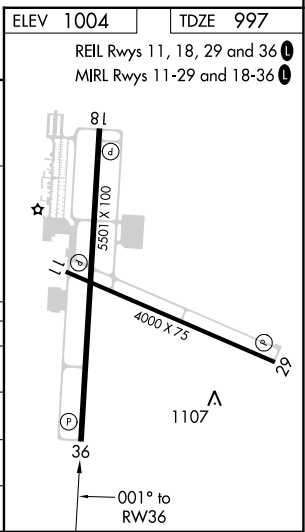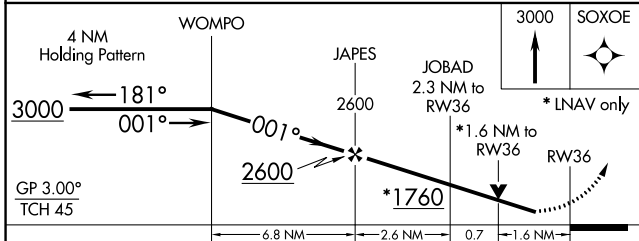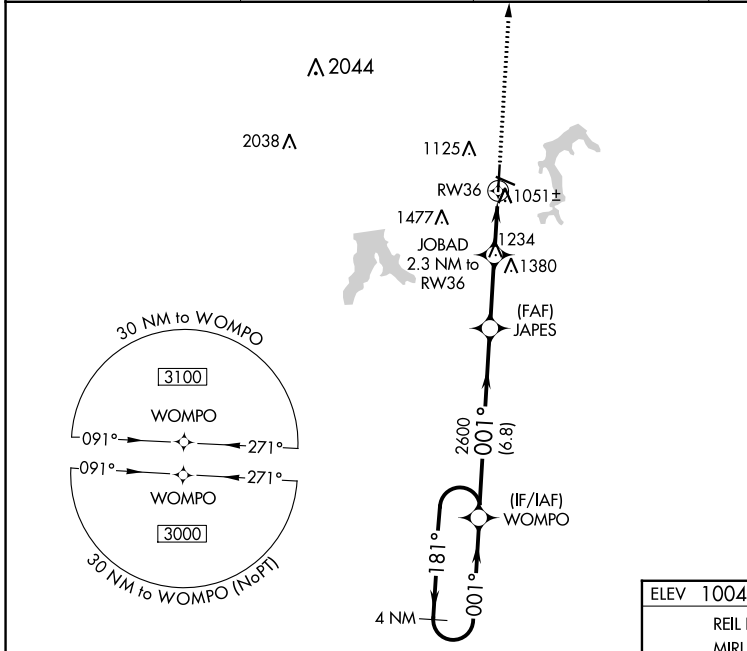

CATEGORY	A	B	C	D
LPV DA		1306-7/8	309 (400-7/8)	
LNAV/VNAV DA		1299-7/8	302 (300-7/8)	
LNAV MDA	1540-1	543 (600-1)	1540-1 1/8	543 (600-1 1/8)
<b>C</b> CIRCLING	1540-1	536 (600-1)	1780-2 1/4 776 (800-2 1/4)	1780-2 1/2 776 (800-2 1/2)

NC-3, 03 OCT 2024 to 31 OCT 2024

NC-3, 03 OCT 2024 to 31 OCT 2024