LOC RWY 10

THOMSON/MCDUFFIE COUNTY (HQU)


LOC I-AAQ	APP CRS	Rwy Ldg	5215
110.75	097°	TDZE	467
		Apt Elev	501

ADF required.

NA — Rwy 10 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use DNL altimeter setting and increase all MDAs 80 feet and S-LOC 10 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct CEDAR NDB and hold, continue climb-in-hold to 2400.

AWOS-3	AUGUSTA APP CON ★	UNICOM
120.625	124.45 270.3	122.8 (CTAF) L

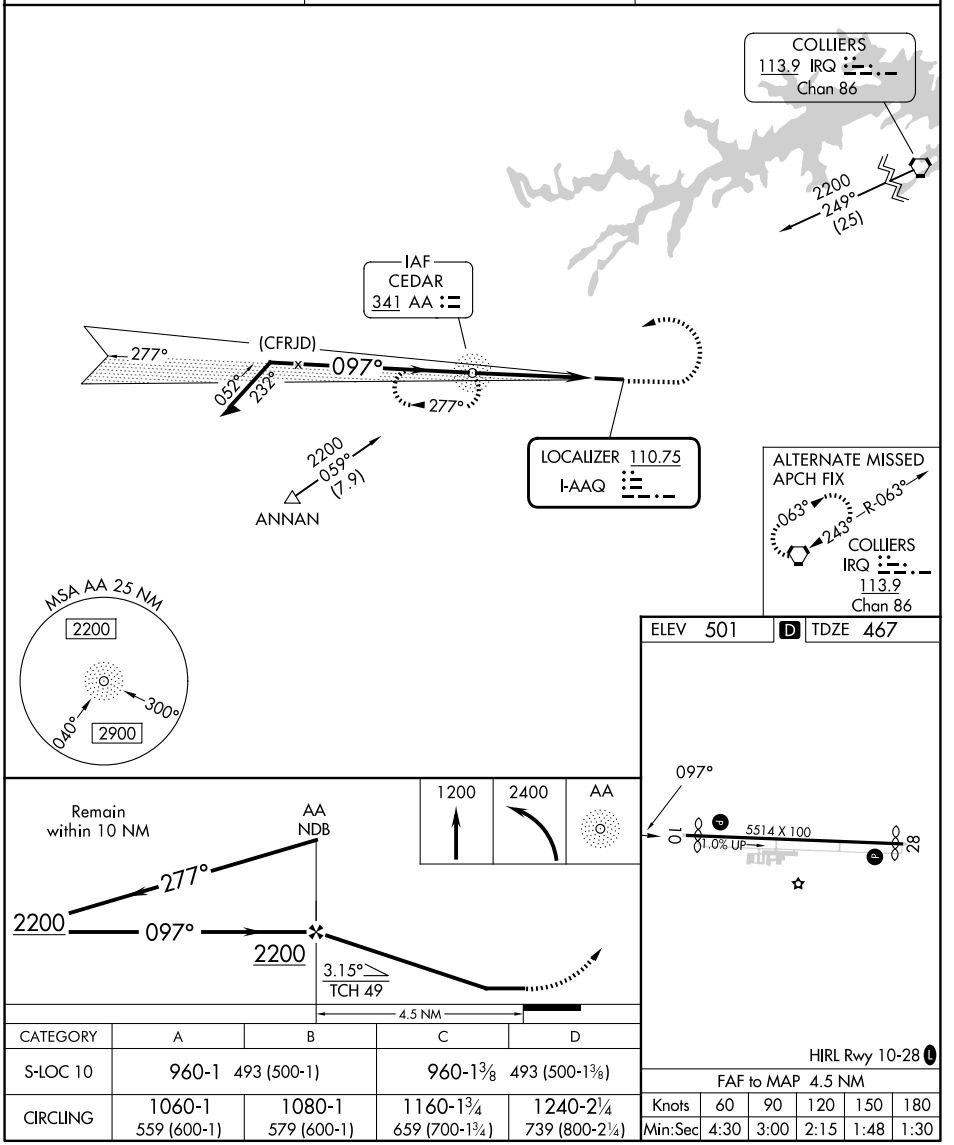

CATEGORY	A	B	C	D
S-LOC 10	960-1 493 (500-1)		960-1⅜ 493 (500-1⅜)	
CIRCLING	1060-1 559 (600-1)	1080-1 579 (600-1)	1160-1¾ 659 (700-1¾)	1240-2¼ 739 (800-2¼)

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026