WAAS CH 87034 W20A	APP CRS 203°	Rwy ldg 5000 TDZE 812 Apt Elev 812

RNAV (GPS) RWY 20
LA PORTE MUNI (PPO)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use South Bend altimeter setting and increase all MDA 60 feet; increase LP Cat C/D and LNAV Cat C/D visibility ⅛ mile. Helicopter visibility reduction below ¾ SM NA. Circling Rwy 14, 32 NA at night.

MISSED APPROACH: Climb to 2300 direct YUKIS and hold.

AWOS-3PT	SOUTH BEND APP CON ★	UNICOM
119.825	132.05 257.8	123.0 (CTAF) L

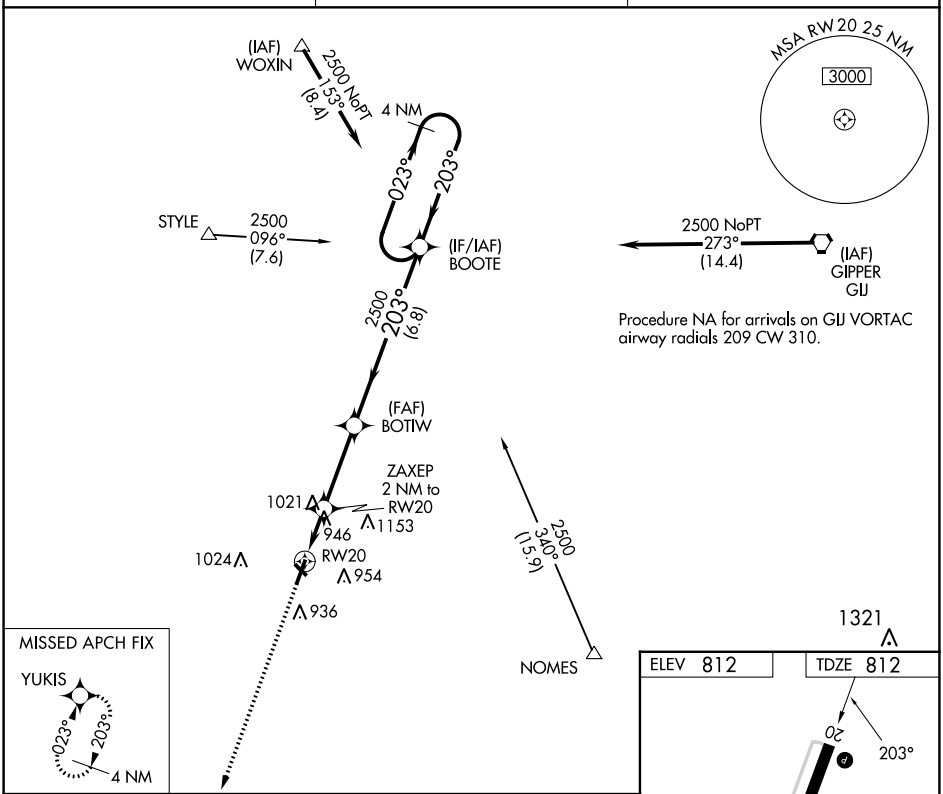

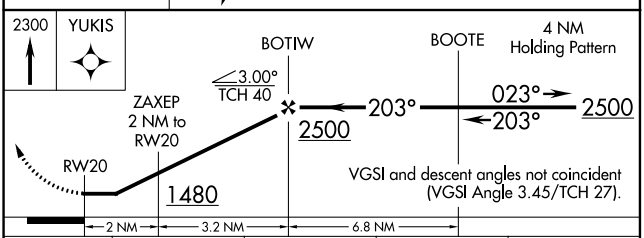

CATEGORY	A	B	C	D
LP MDA	1200-1	388 (400-1)	1200-1⅛	388 (400-1⅛)
LNAV MDA	1280-1	468 (500-1)	1280-1⅜	468 (500-1⅜)
C CIRCLING	1320-1	508 (600-1)	1560-2¼ 748 (800-2¼)	1560-2½ 748 (800-2½)

REIL Rwys 2, 14, 20 and 32 L
MIRL Rwys 2-20 and 14-32 L

EC-2, 08 AUG 2024 to 05 SEP 2024

EC-2, 08 AUG 2024 to 05 SEP 2024