

WAAS CH 61216 W20A	APP CRS 200°	Rwy Idg 6100 TDZE 3786 Apt Elev 3788
--	------------------------	---


RNAV (GPS) RWY 20
HEREFORD MUNI (H.R.X)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 41°C (105°F).
▲ When local altimeter setting not received, use Rick Husband Amarillo Intl altimeter setting: Increase LPV DA to 4098 feet and all Cats visibility ¼ SM, increase LNAV/VNAV DA to 4232 feet and all Cats visibility ¼ SM, increase all MDA 120 feet; increase LNAV Cats C/D visibility ½ SM, increase Circling Cat C visibility ½ SM and Cat D visibility ¼ SM. Baro-VNAV NA when using Rick Husband Amarillo Intl altimeter setting. VDP NA with Rick Husband Amarillo Intl altimeter setting.

MISSED APPROACH:
Climb to 6000 direct
LEMGE and hold.

AWOS-3 118.05	AMARILLO APP CON ★ 119.5 307.0	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

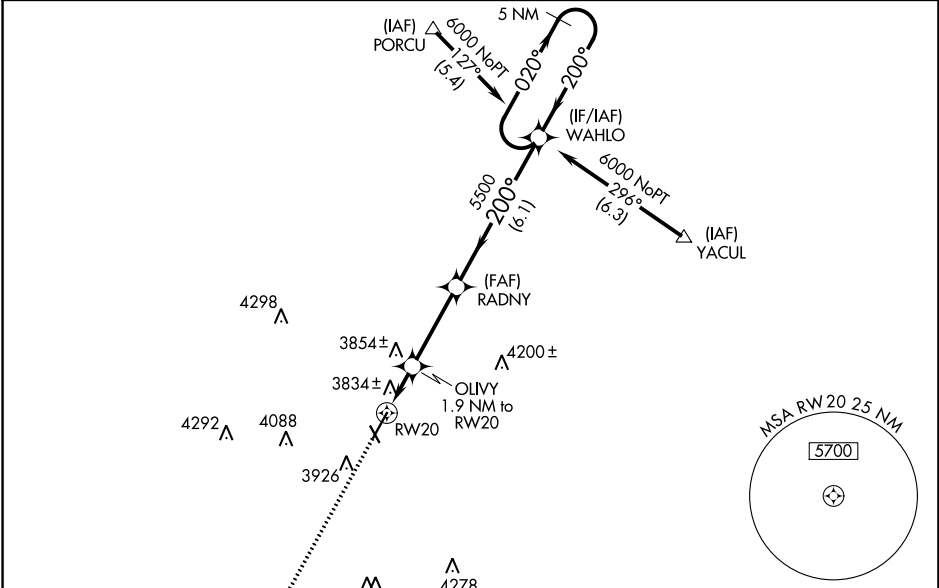

ELEV 3788 TDZE 3786

200° to RW20

6000 LEMGE

*LNAV only. *1.2 NM to RW20 OLIVY 1.9 NM to RW20

GP 3.00° TCH 48

1.2 NM 0.7 NM 3.3 NM 6.1 NM

CATEGORY	A	B	C	D
LPV DA	3986-3/4 200 (200-3/4)			
LNAV/DA	4120-1 1/4 334 (400-1 1/4)			
LNAV MDA	4220-1	434 (500-1)	4220-1 1/4	434 (500-1 1/4)
CIRCLING	4280-1	492 (500-1)	4440-1 3/4	4620-2 3/4

5 NM Holding Pattern

020° 200° 6000

5500

6100 x 100

3807 x 135

MIRL Rwy 2-20 0

SC-2, 18 APR 2024 to 16 MAY 2024

SC-2, 18 APR 2024 to 16 MAY 2024