

WAAS CH 99647	APP CRS 268°	Rwy Ldg TDZE 1061
W27A		Apt Elev 1064

RNAV (GPS) RWY 27

AMELIA EARHART (K59)


RNP APCH - GPS.

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using MCI altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use MCI altimeter setting and increase LPV DA to 1380 feet; increase LNAV/VNAV DA to 1395 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¾ SM.

MISSED APPROACH: Climb to 3000 direct BMACC and hold.

AWOS-3PT 123.675	ST JOSEPH APP CON* 120.35 360.8	UNICOM 122.8 (CTAF) 0
----------------------------	---	--

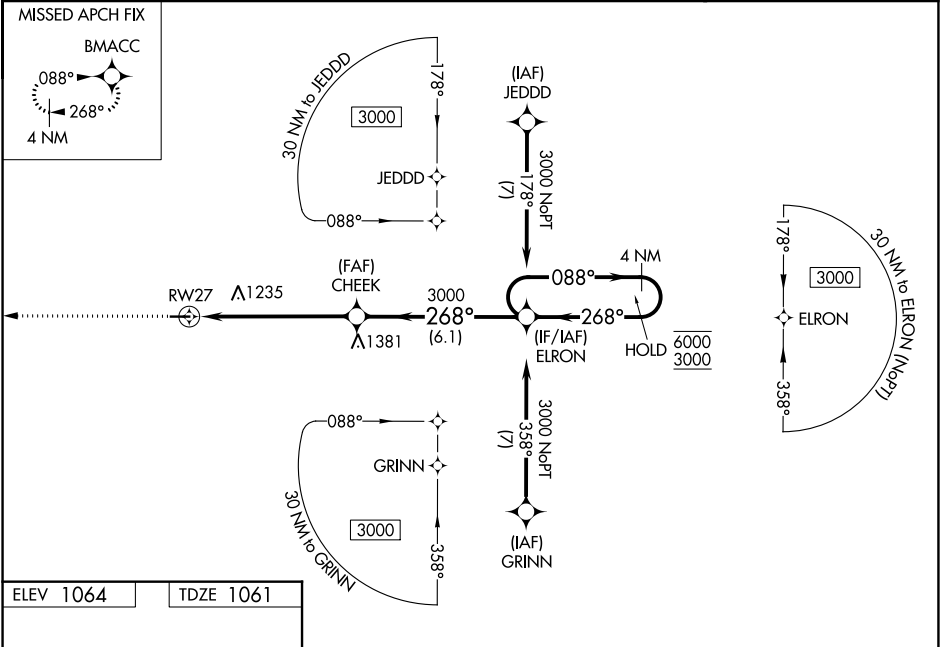

ELEV 1064

TDZE 1061

3000

BMACC

CHEEK

3000

ELRON

4 NM Holding Pattern

1.1 NM to RW27

1.1 NM

4.9 NM

6.1 NM

GP 3.00°

TCH 43

CATEGORY	A	B	C	D
LPV DA	1312-1	251 (300-1)		NA
LNAV/VNAV DA	1327-1	266 (300-1)		NA
LNAV MDA	1440-1	379 (400-1)		NA
CIRCLING	1520-1	456 (500-1)	1580-1½ 516 (600-1½)	NA

MIRL Rwy 9-27 **0**

REIL Rws 9 and 27