


WAAS CH 53647 W09A	APP CRS 088°	Rwy Ldg TDZE 1064 Apt Elev 1064
--	------------------------	---

RNAV (GPS) RWY 9
AMELIA EARHART (K59)

RNP APCH - GPS.	<p>Baro-VNAV and VDP NA when using MCI altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use MCI altimeter setting and increase LPV DA to 1332 feet; increase LNAV/VNAV DA to 1382 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM.</p>	MISSED APPROACH: Climb to 3000 direct ELRON and hold.
-----------------	---	---

AWOS-3PT 123.675	ST JOSEPH APP CON * 120.35 360.8	UNICOM 122.8 (CTAF) 0
----------------------------	--	--

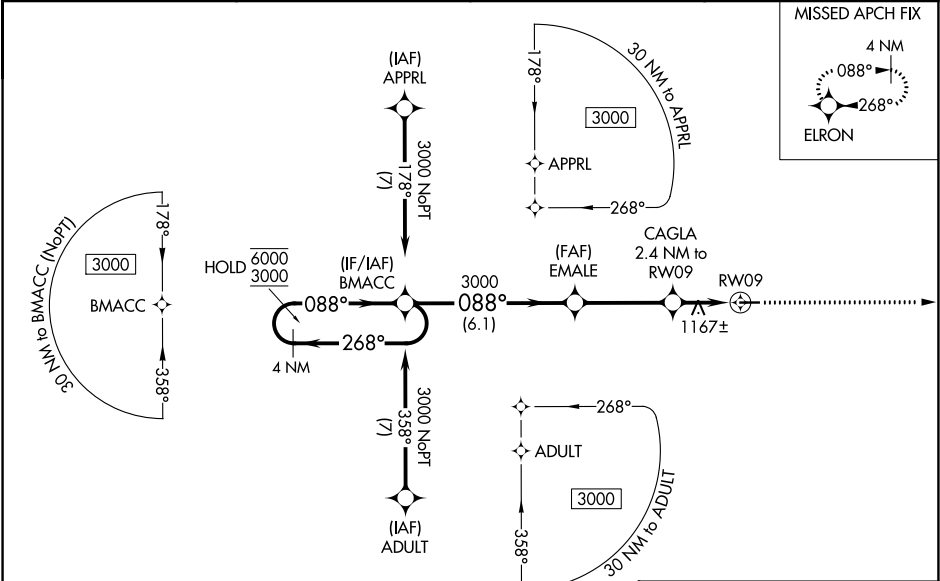

ELEV 1064		TDZE 1064		
<div><div>4 NM Holding Pattern</div><div><div>GP 3.00° TCH 44</div><div>6000 3000</div><div>←268° 088°→</div><div>088°</div><div>3000</div></div></div>		<div><div>BMACC</div><div>EMALE</div><div>3000</div><div>CAGLA 2.4 NM to RW09</div><div>1880</div><div>1 NM to RW09</div><div>RW09</div><div>3000</div><div>ELRON</div></div>		
<div>6.1 NM</div> <div>3.5 NM</div> <div>1.4 NM</div> <div>1 NM</div>		<div>088°</div> <div>4000 X 75</div> <div>0.8% UP</div> <div>27</div>		
CATEGORY	A	B	C	D
LPV DA	1264-1 200 (200-1)			NA
LNAV/VNAV DA	1314-1 250 (300-1)			NA
LNAV MDA	1420-1 356 (400-1)			NA
CIRCLING	1520-1	456 (500-1)	1580-1½ 516 (600-1½)	NA

MIRL Rwy 9-27
REIL Rws 9 and 27