



WAAS CH 42839 W03A	APP CRS 030°	Rwy Idg TDZE Apt Elev	8500 954 969
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 3


PHOENIX GOODYEAR (GYR)

RNP APCH		<p>Procedure NA at night. Helicopter visibility reduction below 3/4 SM NA. VDP NA when using Phoenix Sky Harbor Intl altimeter setting. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting; increase all MDA 80 feet and visibility LP/LNAV Cat C/D and Circling Cat C 1/4 SM.</p>		<p>MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct TATUY and hold.</p>	
----------	--	--	--	--	--

ATIS 118.35	LUKE APP CON ★ 125.45 263.125	GOODYEAR TOWER ★ 120.1 (CTAF) 239.3	GND CON 121.7	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

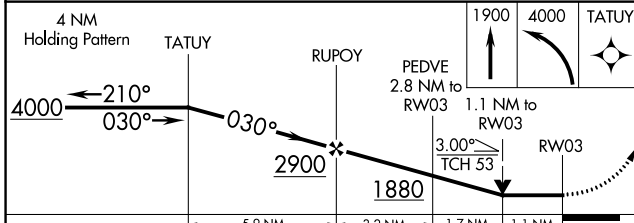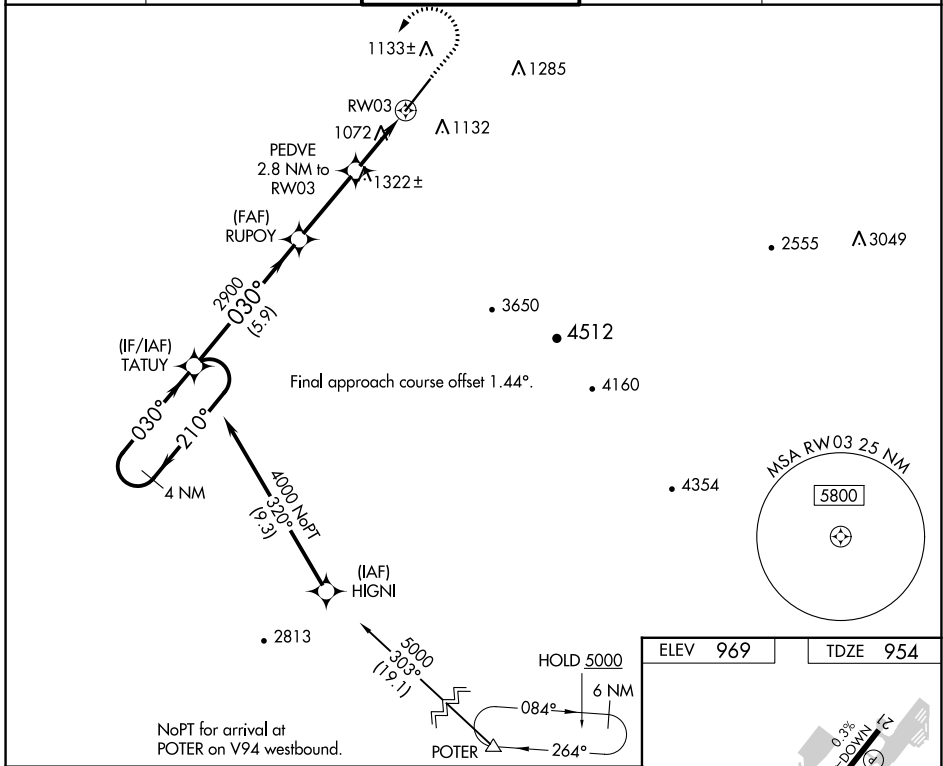

ELEV 969	TDZE 954
----------	----------

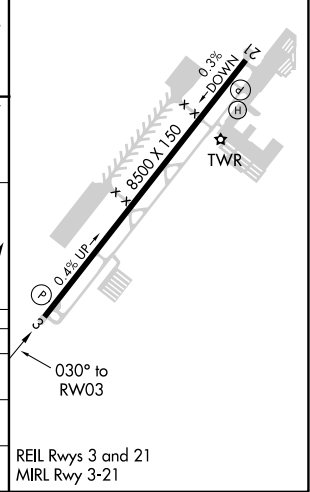

CATEGORY	A	B	C	D
LP MDA	1340-1 386 (400-1)		1340-1 386 (400-1 1/8)	
LNAV MDA	1580-1 626 (700-1)		1580-1 3/4 626 (700-1 3/4)	
C CIRCLING	1580-1 611 (700-1)		1860-2 3/4 891 (900-2 3/4)	1920-3 951 (1000-3)

SW-4, 03 OCT 2024 to 31 OCT 2024

SW-4, 03 OCT 2024 to 31 OCT 2024