

APP CRS	Rwy Idg	3301
060°	TDZE	1215
	Apt Elev	1215


RNAV (GPS) RWY 6
MARSHALL COUNTY (MPG)

RNP APCH.

▼ Rwy 6 helicopter visibility reduction below ¾ SM NA. VDP NA when using Wheeling altimeter setting. When local altimeter setting not received, use Wheeling altimeter setting: increase all MDA 60 feet and visibility LNAV Cat C ½ SM and Circling Cat C ¼ SM.

▲ NA MISSED APPROACH: Climb to 3100 direct EWBUFF and hold.

AWOS-3 119.05	CLEVELAND CENTER 126.95 239.30	UNICOM 122.7 (CTAF) ①
------------------	-----------------------------------	--------------------------

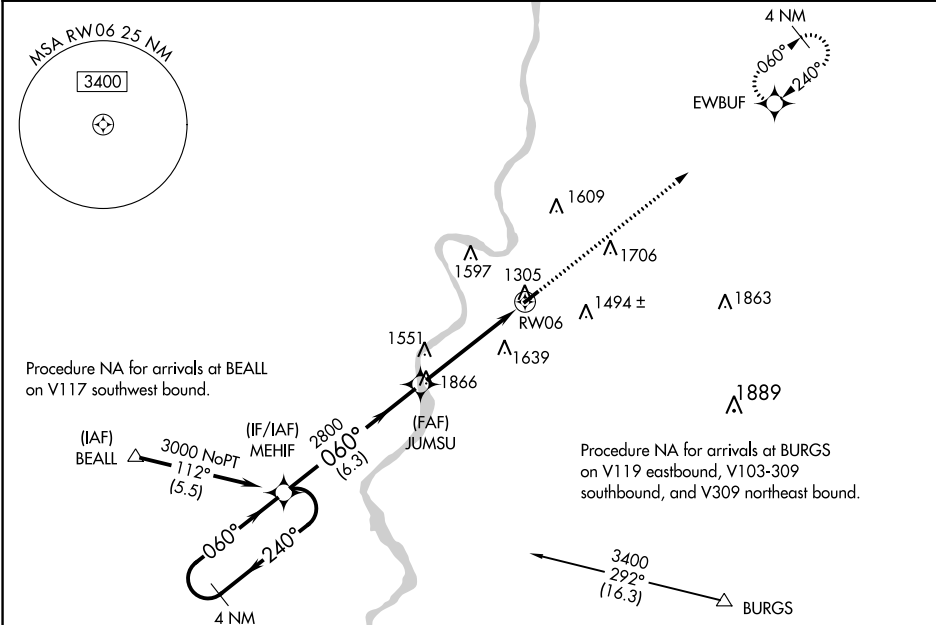

ELEV 1215		TDZE 1215		
4 NM Holding Pattern MEHIF Visual Segment - Obstacles. 3100 EWBUF 3000 ← 240° 060° → JUMSU 1.5 NM to RW06 RW06 2800 6.3 NM 3.3 NM 1.5 NM				
CATEGORY	A	B	C	D
LNAV MDA	1860-1	645 (700-1)	1860-1 7/8 645 (700-1 7/8)	NA
CIRCLING	1860-1	645 (700-1)	1940-2 725 (800-2)	NA

MIRL Rwy 6-24 ①

060°

3301 X 60

0.6% UP