WAAS CH 56318 W29A	APP CRS 292°	Rwy Idg 4266 / TDZE 831 / Apt Elev 838

RNAV (GPS) RWY 29

SPARTA/FORT MC COY (CMY)

Circling to Rwy 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM not authorized. Baro-VNAV and VDP NA when using La Crosse altimeter setting. When local altimeter setting not received, use La Crosse altimeter setting and increase all DA 79 feet and all MDA 80 feet; increase LPV all Cats visibility ⅜ mile, and LNAV/VNAV all Cats and LNAV and Circling Cats C/D visibility ¼ mile. Procedure not authorized when R-6901B is active.

MISSED APPROACH: Climb to 4000 direct ESOKY and hold.

ASOS	VOLK APP CON ★	SPARTA/MC COY TOWER ★	GND CON	CTAF
119.775	135.25 244.875	124.6 254.375	123.625	124.6 L

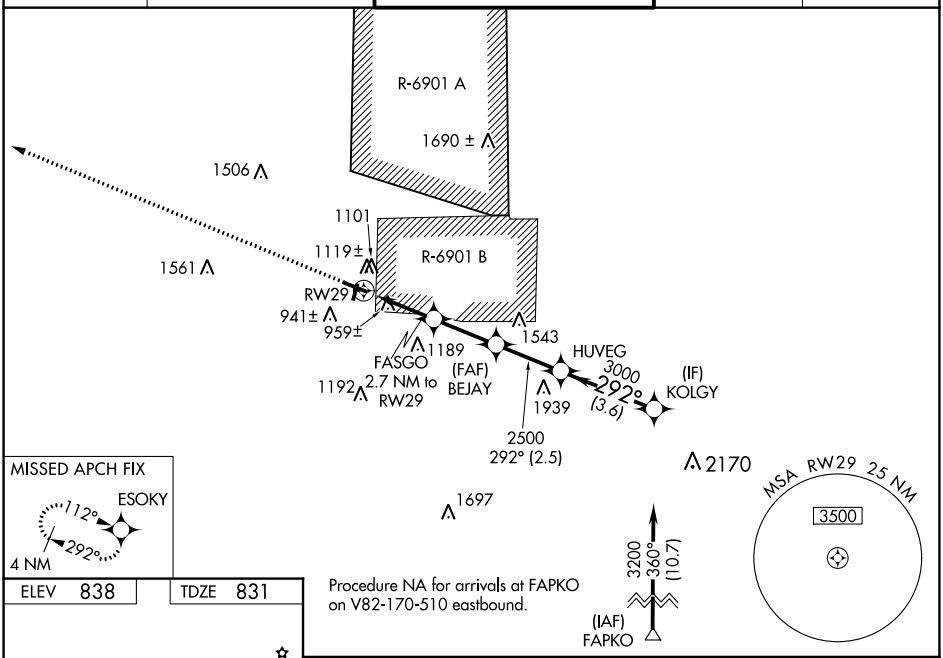

ELEV 838 TDZ 831



REIL Rwys 11 and 29 L
MIRL Rwys 1-19 and 11-29 L

4000 ESOKY

*LNAV only

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).

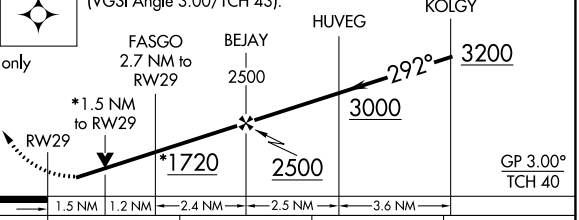

CATEGORY	A	B	C	D
LPV DA	1107-⅞ 276 (300-⅞)			
LNAV/VNAV DA	1263-1½ 432 (500-1½)			
LNAV MDA	1320-1 489 (500-1)		1320-1⅜ 489 (500-1⅜)	
CIRCLING	1520-1 682 (700-1)	1560-1 722 (800-1)	1620-2¼ 782 (800-2¼)	1860-3 1022 (1100-3)

EC-3, 31 OCT 2024 to 28 NOV 2024
EC-3, 31 OCT 2024 to 28 NOV 2024