

|                           |                        |   |
|---------------------------|------------------------|---|
| LOC I-UXL<br><b>109.3</b> | APP CRS<br><b>146°</b> | Rwy Idg <b>5001</b><br>TDZE <b>10</b><br>Apt Elev <b>10</b> |
|---------------------------|------------------------|---|




**LOC RWY 15**  
SOUTHLAND FLD (UXL)

**⚠** Inoperative table does not apply to S-15 Cat C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase all MDA 20 feet and Circling visibility Cat C/D ¼ SM.

**ODALS**

**MISSED APPROACH:** Climb to 500 then climbing right turn to 2400 direct AUR NDB and hold, continue climb-in-hold to 2400.

|                            |   |                                 |
|----------------------------|---|---------------------------------|
| AWOS-3PT<br><b>118.175</b> | LAKE CHARLES APP CON *<br><b>119.35 282.3</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|---|---------------------------------|

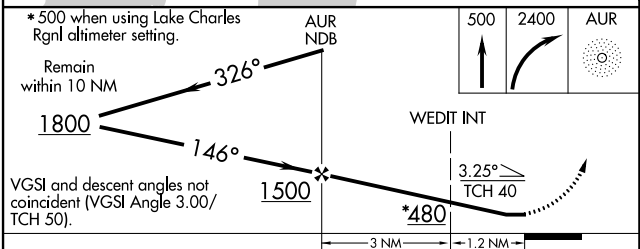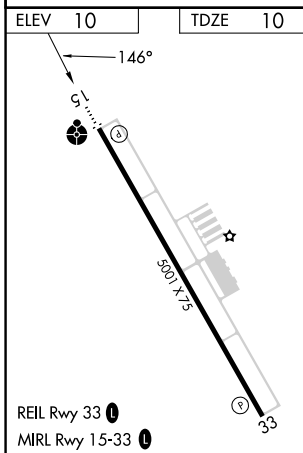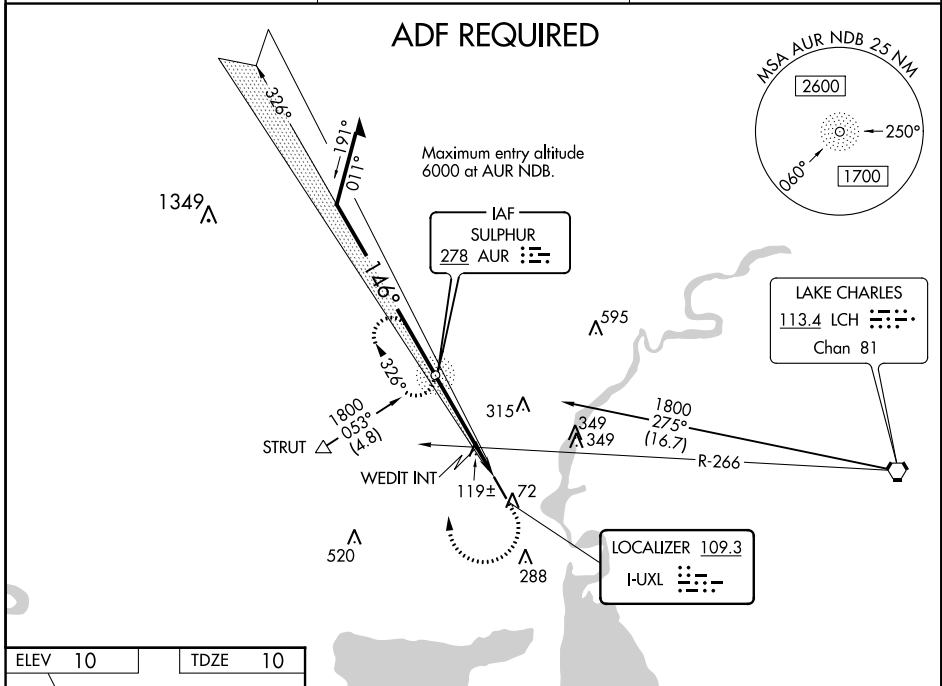

| CATEGORY           | A                    | B                    | C                      | D                      |
|--------------------|----------------------|----------------------|------------------------|------------------------|
| S-15               | 480-¾<br>470 (500-¾) | 470 (500-¾)          | 480-1¼<br>470 (500-1¼) | 480-1½<br>470 (500-1½) |
| CIRCLING           | 480-1<br>470 (500-1) | 520-1<br>510 (600-1) | 680-1¾<br>670 (700-1¾) | 680-2<br>670 (800-2)   |
| WEDIT FIX MINIMUMS |                      |                      |                        |                        |
| S-15               | 380-¾<br>370 (400-¾) |                      |                        | 380-1¼<br>370 (400-1¼) |
| CIRCLING           | 420-1<br>410 (500-1) | 520-1<br>510 (600-1) | 680-1¾<br>670 (700-1¾) | 680-2<br>670 (700-2)   |

SC-4, 13 JUN 2024 to 11 JUL 2024

SC-4, 13 JUN 2024 to 11 JUL 2024