

WAAS CH 56605 W05A	APP CRS 047°	Rwy Idg TDZE 1219 Apt Elev 1219
--	------------------------	---

RNAV (GPS) RWY 5

CHEROKEE COUNTY RGNL (CNI)

RNP APCH-GPS.

⚠

Circling Rwy 23 NA at night. Baro-VNAV and VDP NA when using Marietta altimeter setting.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C.

⚠

When local altimeter setting not received, use Marietta altimeter setting and increase LPV DA to 1546 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1631 feet; increase all MDAs 80 feet and LNAV Cats C/D visibility ½ SM and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 5400 direct STEVN and hold, continue climb-in-hold to 5400.

AWOS-3PT 119.825	ATLANTA APP CON 121.0 268.7	UNICOM 123.0 (CTAF) 0
----------------------------	---------------------------------------	---------------------------------

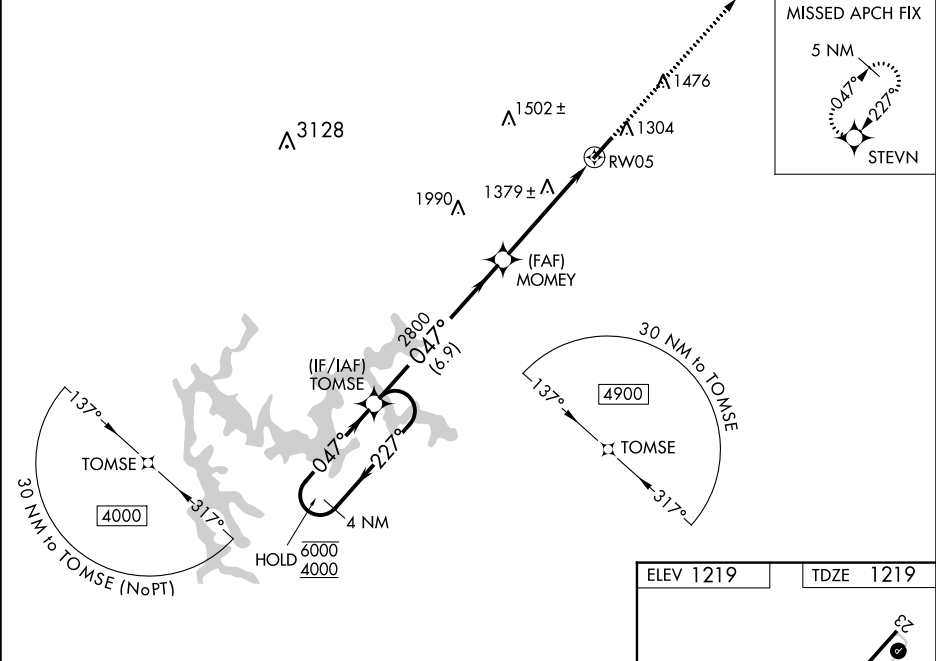

4 NM Holding Pattern TOMSE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).		5400 STEVN
CATEGORY	A	B	C	D
LPV DA	1469-7⁄8		250 (300-7⁄8)	
LNAV/VNAV DA	1554-1⁄8		335 (400-1⁄8)	
LNAV MDA	1640-1	421 (500-1)	1640-1¼	421 (500-1¼)
CIRCLING	1720-1	501 (600-1)	1820-1¾ 601 (700-1¾)	2040-2¾ 821 (900-2¾)

