

WAAS CH 78115 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev 5001 454 458	RNAV (GPS) RWY 18 PHILADELPHIA MUNI (MPF)
--	------------------------	--	---



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
When local altimeter setting not received, use Key Fld altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV all Cats, LNAV Cat C and Circling Cats C and D visibility ¼ mile, increase LNAV/VNAV all Cats, LNAV Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Key Fld altimeter setting.

MISSED APPROACH:
Climb to 3000 direct OKDAE and hold.

AWOS-3P 118.725	MEMPHIS CENTER 132.75 263.0	UNICOM 123.0 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

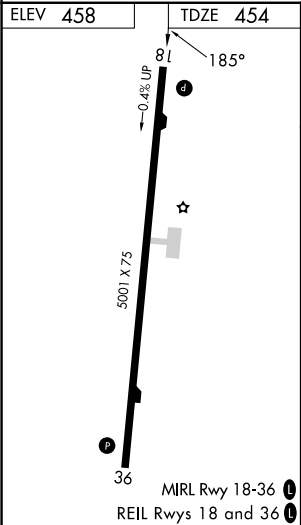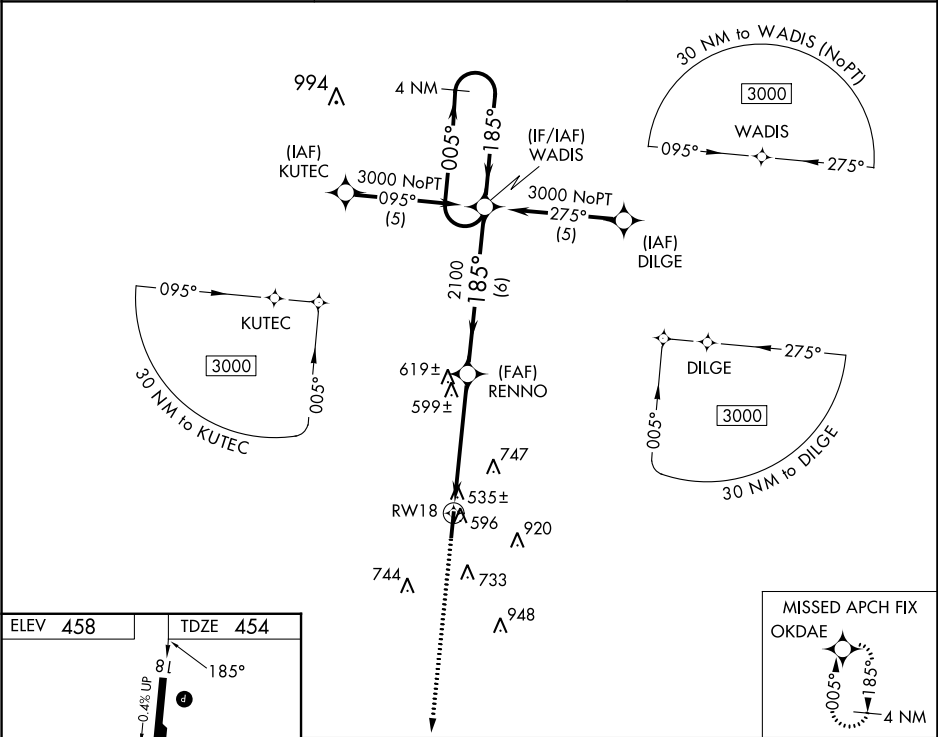

3000	OKDAE	RENNO	WADIS	4 NM Holding Pattern
*LNAV only.	*1.5 NM to RW18	2100	185°	005° → 3000
1.5	3.5	6		
CATEGORY	A	B	C	D
LPV DA	774-1¼		320 (400-1¼)	
LNAV/VNAV DA	850-1½		396 (400-1½)	
LNAV MDA	960-1 506 (600-1)		960-1½ 506 (600-1½)	
CIRCLING	1060-1 602 (700-1)		1280-2½ 822 (900-2½)	1280-2¾ 822 (900-2¾)