

WAAS CH 50133 W11A	APP CRS 105°	Rwy Idg 3302 TDZE 1183 Apt Elev 1183
--	------------------------	---


RNAV (GPS) RWY 11

PAYNESVILLE MUNI (PEX)

Baro-VNAV and VDP NA when using Litchfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Litchfield altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1⁄8 mile and LNAV Cat C and Circling Cat C visibility 1⁄4 mile.

MISSED APPROACH:
Climb to 3000 direct UDALÉ and hold.

AWOS-3PT 120.35	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
---------------------------	--	------------------------

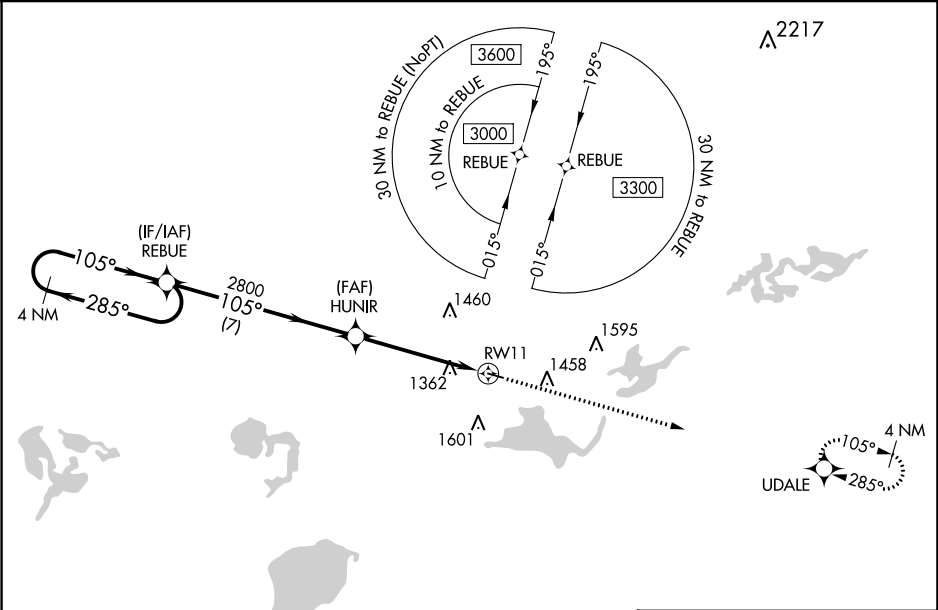

ELEV 1183

TDZE 1183

4 NM Holding Pattern

REBUE

HUNIR

UDALÉ

GP 3.00° TCH 42

3000

285°

105°

2800

105°

2800

7 NM

3.5 NM

1.4 NM

*1.4 NM to RW11

*LNAV only.

RW11

105° to RW11

3302 x 75

20

CATEGORY	A	B	C	D
LPV DA	1383-1 200 (200-1)			NA
LNAV/VNAV DA	1653-1½ 470 (500-1½)			NA
LNAV MDA	1680-1 497 (500-1)		1680-1¾ 497 (500-1¾)	NA
CIRCLING	1680-1 497 (500-1)	1760-1 577 (600-1)	1920-2 737 (800-2)	NA

MIRL Rwy 11-29 0
REIL Rws 11 and 29 0

NC-1, 11 JUL 2024 to 08 AUG 2024

NC-1, 11 JUL 2024 to 08 AUG 2024