


WAAS CH 77747 W13A	APP CRS 130°	Rwy Ldg TDZE Apt Elev	3798 3497 3505
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

EKALAKA (97M)

RNP APCH - GPS.	MISSED APPROACH: Climb to 7000 direct DUWOP and hold, continue climb-in-hold to 7000.
Baro-VNAV NA. Use BHK altimeter setting; when not received, use BWW altimeter setting and increase LPV DA to 3967 feet and all visibilities ¼ SM, increase LNAV/VNAV DA to 4320 feet; increase all MDAs 60 feet.	

BHK ASOS 135.475	SALT LAKE CENTER 126.85 305.2	CTAF 122.9 0
----------------------------	---	------------------------

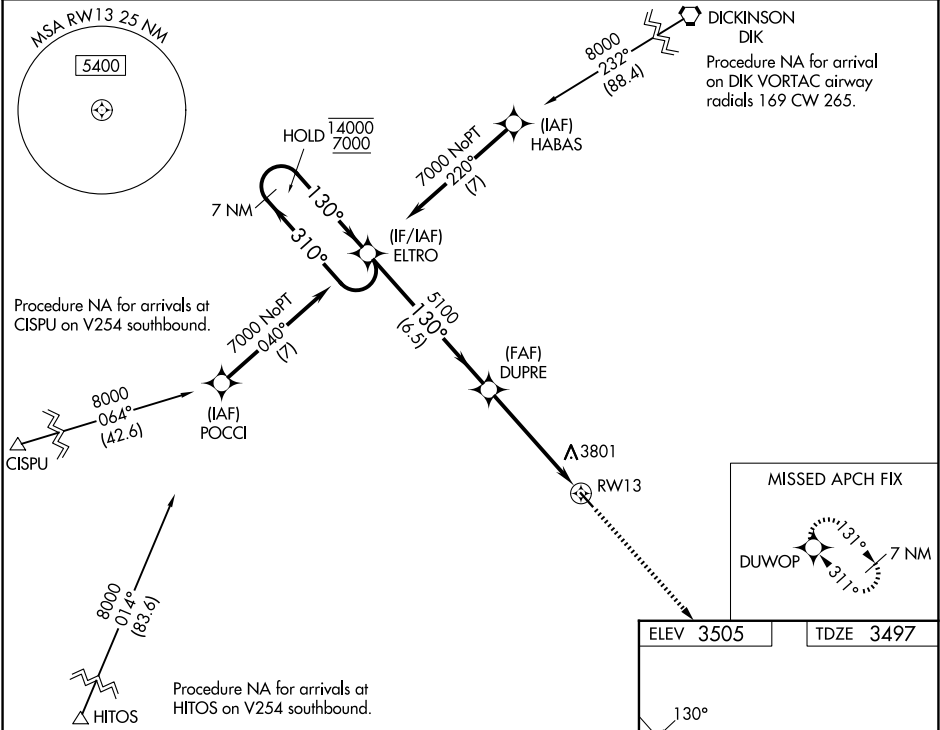

7 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).		7000	DUWOP
14000 7000		ELTRO	DUPRE	5100	RWY13
GP 3.00° TCH 45		6.5 NM	5 NM		
CATEGORY	A	B	C	D	
LPV DA	3907-1 1/8		410 (500-1 1/8)		
LNAV/VNAV DA	4260-2 1/2		763 (800-2 1/2)		
LNAV MDA	4260-1 763 (800-1)	4260-1 1/4 763 (800-1 1/4)	4260-2 1/2	763 (800-2 1/2)	

MIRL Rwy 13-31 0