RNAV (GPS) RWY 1R

BRUNSWICK EXEC (BXM)

WAAS	APP CRS	Rwy Idg	8000
CH 69415	013°	TDZE	63
W01A		Apt Elev	75

T A Baro-VNAV NA when using Portland altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA when using Portland altimeter setting. When local altimeter setting not received, use Portland altimeter setting and increase LPV DA to 314, LNAV/VNAV DA to 461 and all LNAV/VNAV visibilities ¼ SM; increase all MDA 60 feet and all LNAV Cat C/D visibilities ¼ SM and Circling Cat C/D visibilities ¼ SM. For inop ALS when using Portland altimeter setting, increase LNAV Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2500 direct WODGI and hold.

AWOS-3PT	PORTLAND APP CON ★		CLNC DEL	UNICOM
134.875	(112°-292°) 119.75 269.35	(293°-111°) 120.4 299.2	123.65	122.725 (CTAF) L

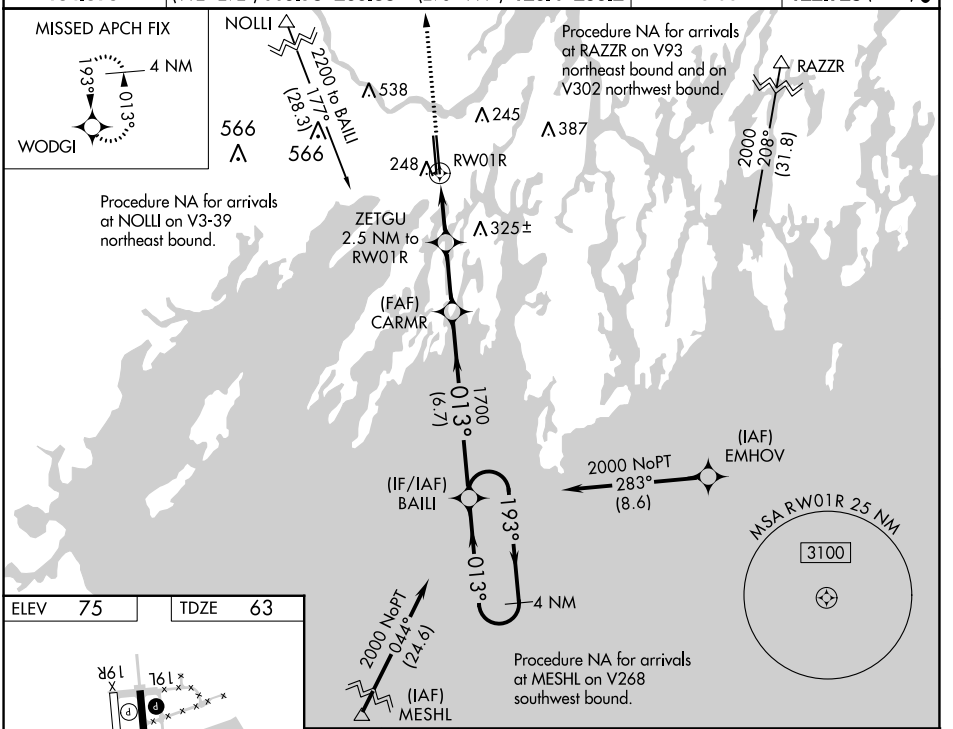

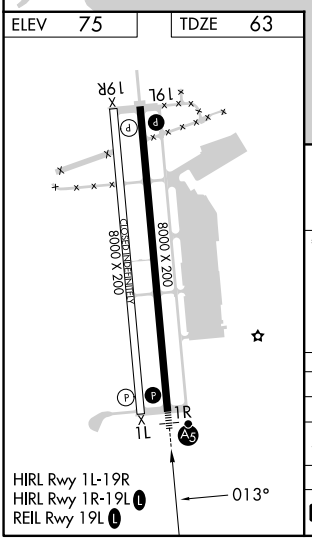

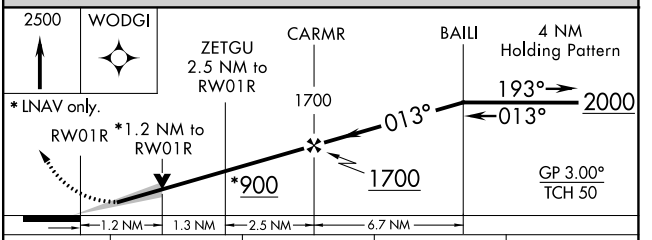

CATEGORY		A	B	C	D
LPV	DA	263-½	200 (200-½)		
LNAV/VNAV	DA	410-⅝	347 (400-⅝)		
LNAV	MDA	500-½	437 (500-½)	500-¾	437 (500-¾)
C CIRCLING		560-1	485 (500-1)	840-2¼ 765 (800-2¼)	840-2½ 765 (800-2½)

NE-1, 08 AUG 2024 to 05 SEP 2024
NE-1, 08 AUG 2024 to 05 SEP 2024