

APP CRS	Rwy Idg	13502
038°	TDZE	3607
	Apt Elev	3607


RNAV (RNP) Z RWY 4
RICK HUSBAND AMARILLO INTL (AMA)

T For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 53°C (128°F).
ASR RF required. GPS required. For inop ALS, increase RNP 0.30 **all** Cats visibility to 1 3/8 SM.



MISSED APPROACH: (Do not exceed 185K until MAWGO)
Climb to 5400 on track 038° to KILTE, right turn to
MAWGO, then track 157° to CAUDE and hold.


ATIS 118.85 350.3	AMARILLO APP CON ★ 119.5 307.0	AMARILLO TOWER ★ 118.3(CTAF) 0 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
----------------------	-----------------------------------	---	------------------------	----------------------------	------------------

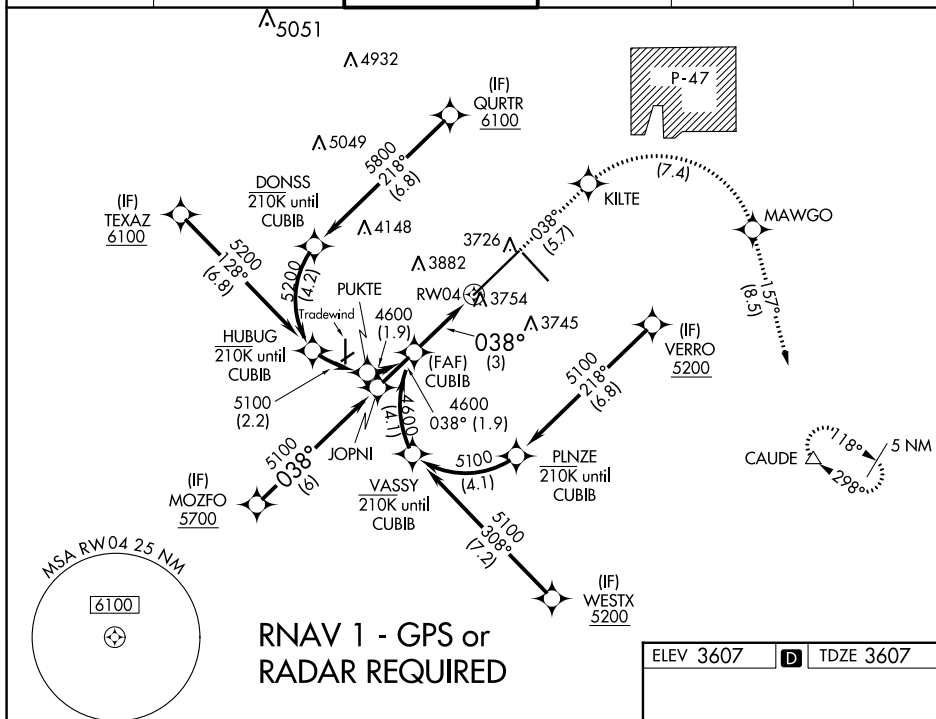

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 61).



See planview for multiple IF locations.

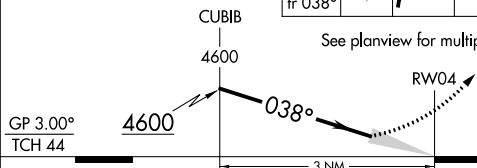

CATEGORY	A	B	C	D
RNP 0.12 DA		3969/40	362 (400-¾)	
RNP 0.30 DA		4019/50	412 (500-1)	

AUTHORIZATION REQUIRED

