

WAAS CH 57919 W13A	APP CRS 129°	Rwy Idg TDZE 3603 Apt Elev 3607
--	------------------------	---


RNAV (GPS) Y RWY 13
RICK HUSBAND AMARILLO INTL (AMA)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C.
ASR

MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold.

ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-----------------------------------	-------------------------

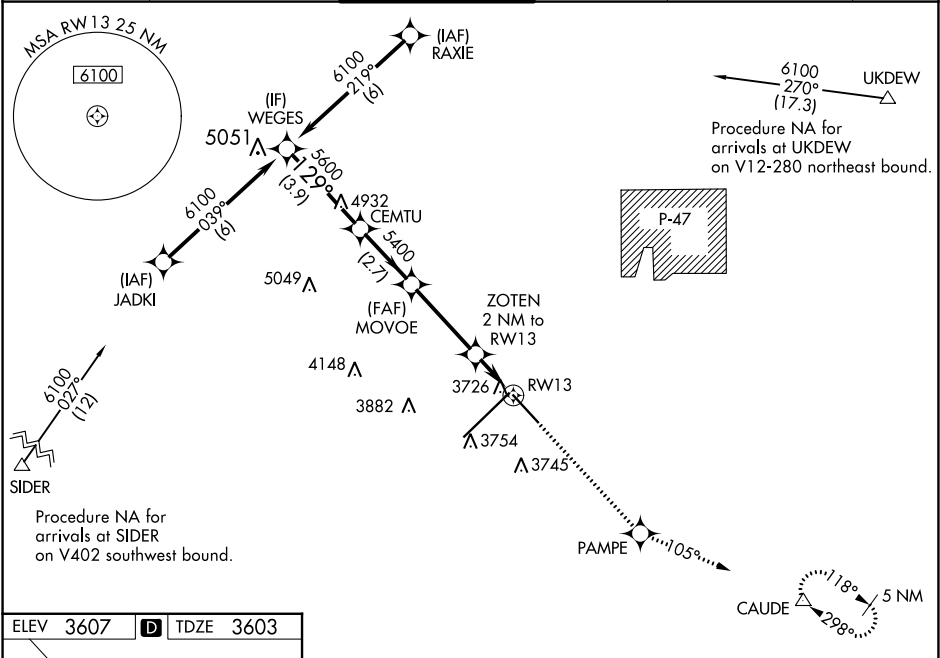

ELEV 3607	D	TDZE 3603
-----------	---	-----------

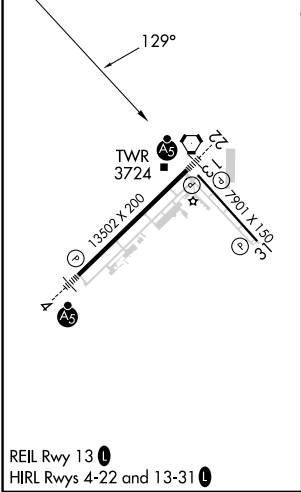

WEGES	CEMTU	MOVOE	ZOTEN 2 NM to RW13	PAMPE	CAUDE
6100	5600	5400	*4280	5400	tr 105°
Procedure Turn NA	GP 3.00° TCH 52	*1 NM to RW13	*LNAV only.		
3.9 NM	2.7 NM	3.4 NM	1 NM	1 NM	
CATEGORY	A	B	C	D	
LPV DA	3803-3/4	200 (200-3/4)			
LNAV/VNAV DA	3976-1 1/4	373 (400-1 1/4)			
LNAV MDA	3980-1	377 (400-1)			3980-1 1/4 377 (400-1 1/4)
CIRCLING	4080-1	473 (500-1)	4240-1 3/4 633 (700-1 3/4)	4280-2 1/4 673 (700-2 1/4)	