


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>82319</b><br><b>W31A</b> | APP CRS<br><b>310°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7901</b><br><b>3601</b><br><b>3607</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|


**RNAV (GPS) Y RWY 31**  
RICK HUSBAND AMARILLO INTL (AMA)

|                                                                                                                                                                                                                                                                                                                                                                          |            |                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------------|
| <b>⚠</b> DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 46°C (116°F). When local altimeter setting not received, use Borger altimeter setting: increase DA to 4004 and all visibilities ⅝ mile; increase all MDA 160 feet and visibility Cat C and D ½ mile. Baro-VNAV and VDP NA when using Borger altimeter setting. | <b>ASR</b> | <b>MISSED APPROACH:</b> Climb to 6100 direct MOVEO and on track 317° to LANIT and hold. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------------|

|                             |                                         |                                              |                               |                                   |                         |
|-----------------------------|-----------------------------------------|----------------------------------------------|-------------------------------|-----------------------------------|-------------------------|
| ATIS<br><b>118.85 350.3</b> | AMARILLO APP CON★<br><b>119.5 307.0</b> | AMARILLO TOWER★<br><b>118.3 (CTAF) 257.9</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>121.65 239.275</b> | UNICOM<br><b>122.95</b> |
|-----------------------------|-----------------------------------------|----------------------------------------------|-------------------------------|-----------------------------------|-------------------------|

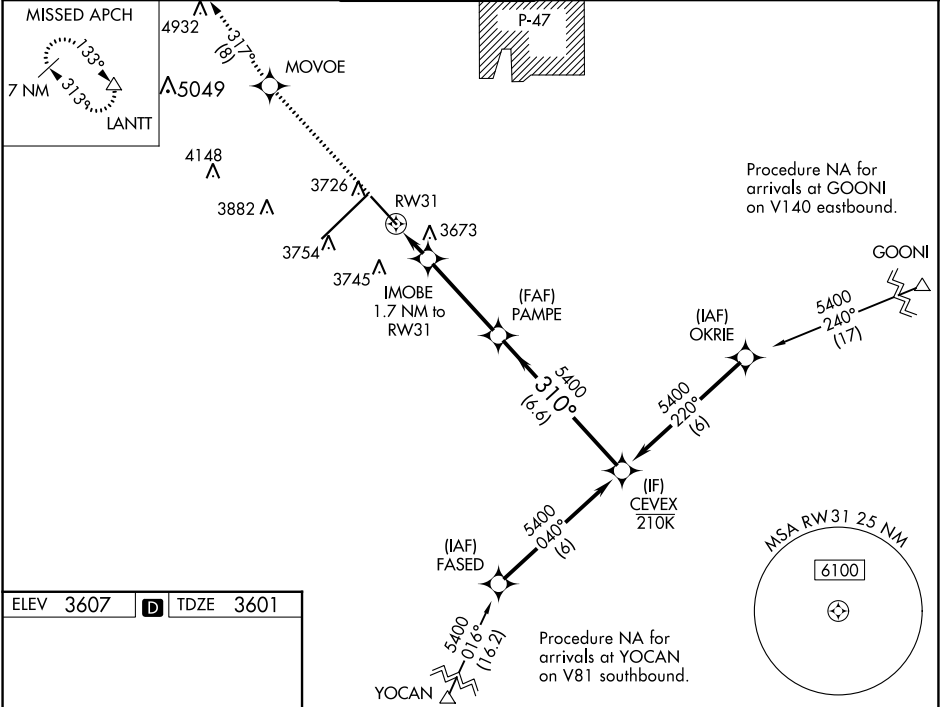

|                  |          |                  |
|------------------|----------|------------------|
| ELEV <b>3607</b> | <b>D</b> | TDZE <b>3601</b> |
|------------------|----------|------------------|

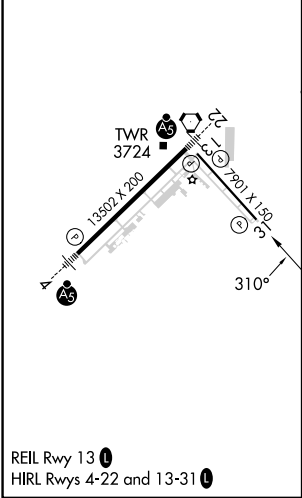

|                                                                                                                                     |             |              |                               |                               |   |
|-------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------|-------------------------------|-------------------------------|---|
| 6100<br>↑                                                                                                                           | MOVVOE<br>✦ | tr 317°<br>↻ | LANIT<br>△                    |                               |   |
| <p>*LNAV only.</p> <p>RW31 0.9 NM to RW31</p> <p>IMOB 1.7 NM to RW31</p> <p>PAMPE 5400</p> <p>CEVEX 5400</p> <p>GP 3.04° TCH 52</p> |             |              |                               |                               |   |
| CATEGORY                                                                                                                            | A           |              | B                             | C                             | D |
| LPV DA                                                                                                                              |             |              | 3851-3/4                      | 250 (300-3/4)                 |   |
| LNAV/VNAV DA                                                                                                                        |             |              | 3851-3/4                      | 250 (300-3/4)                 |   |
| LNAV MDA                                                                                                                            |             |              | 3940-1                        | 339 (400-1)                   |   |
| CIRCLING                                                                                                                            | 4080-1      | 473 (500-1)  | 4240-1 3/4<br>633 (700-1 3/4) | 4280-2 1/4<br>673 (700-2 1/4) |   |