
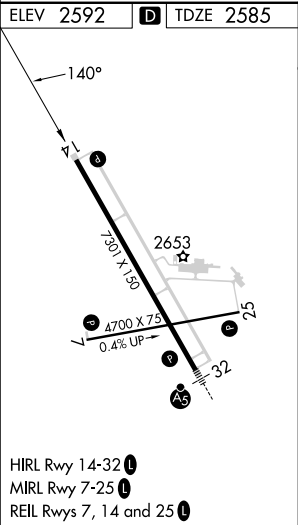


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct LUFGI and hold.

ASOS 118.375	MINNEAPOLIS CENTER 124.25 236.825	UNICOM 123.0 (CTAF) 0
-----------------	--------------------------------------	--------------------------

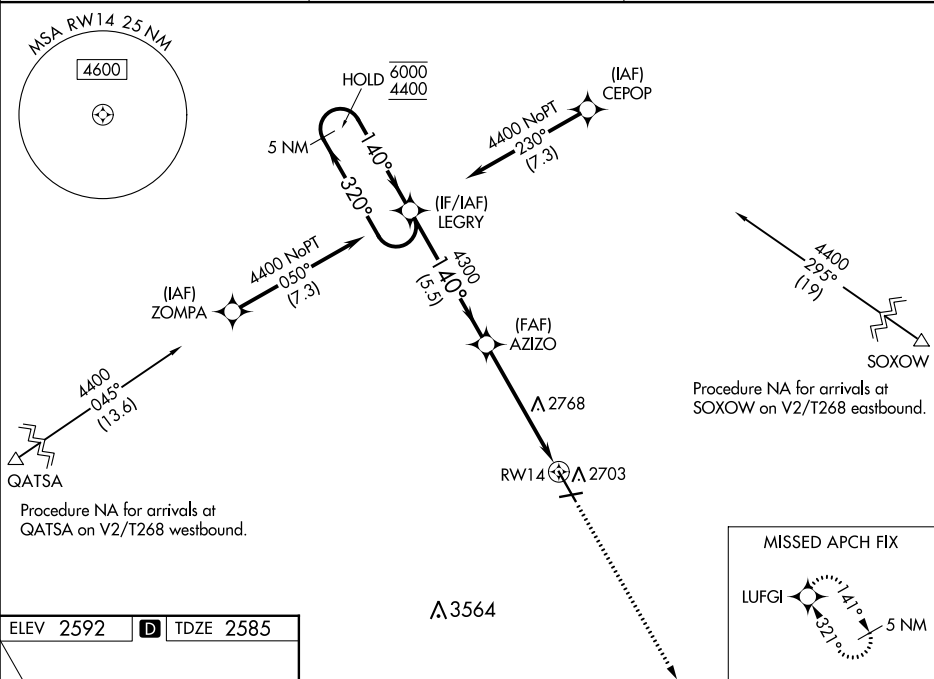

5 NM Holding Pattern LEGRY 6000 4400 GP 3.00° TCH 50				5000 LUFGI
140° 320° 140° 140° 4300 4300 1.2 NM to RW14 RW14				
5.5 NM 4 NM 1.2 NM				
CATEGORY	A	B	C	D
LPV DA	2785-3/4 200 (200-3/4)			
LNAV/VNAV DA	2835-3/4 250 (300-3/4)			
LNAV MDA	3020-1 435 (500-1)		3020-1 1/4 435 (500-1 1/4)	
CIRCLING	3060-1 468 (500-1)		3120-1 1/2 528 (600-1 1/2)	3200-2 608 (700-2)