


ATIS 110.6 270.1	AL-150 [USAF]	RNAV1-GPS	Rwy	Knots	60	120	180	240	300	360
CLNC DEL			06	V/V(fpm)	237	474	711	948	1185	1422
135.2 335.8			18	V/V(fpm)	387	774	1161	1548	1935	2322
GND CON			24	V/V(fpm)	384	768	1152	1536	1920	2304
121.8 275.8			36	V/V(fpm)	213	426	639	852	1065	1278
TOWER										

118.65 255.6

MC GUIRE APP CON/DEP CON

126.475 363.8

ATC Climb Rate to 8000

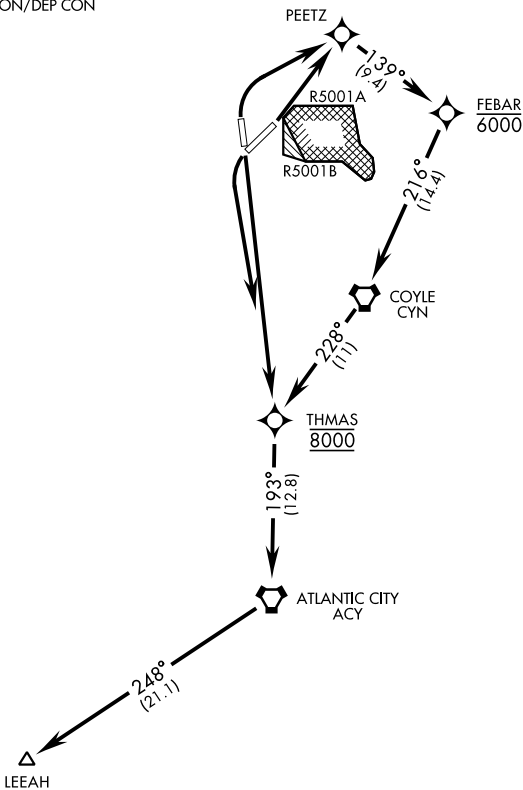

Rwy 06 Departure: RADAR required
(when R-5001 is active)

If RADAR inoperative, expect 15 min
delay for deactivation of R-5001.

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 06: Climb direct PEETZ then track and climb as depicted. Maintain 8000.

TAKEOFF RWY 18: Climb direct to cross THMAS at and maintain 8000, then track as depicted.

TAKEOFF RWY 24: Climbing left turn direct to cross THMAS at and maintain 8000, then track as depicted.

TAKEOFF RWY 36: Climbing right turn direct PEETZ then track and climb as depicted. Maintain 8000.

Expect further ATC clearance to filed altitude within 10 minutes after departure.

NE-2, 16 MAY 2024 to 13 JUN 2024

NE-2, 16 MAY 2024 to 13 JUN 2024