


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>90210</b><br><b>W23B</b> | APP CRS<br><b>231°</b> | Rwy Idg<br>TDZE <b>965</b><br>Apt Elev <b>986</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 23L

MC GHEE TYSON(T'YS)

|                                                                                |                                  |                                |                                                                          |                    |
|--------------------------------------------------------------------------------|----------------------------------|--------------------------------|--------------------------------------------------------------------------|--------------------|
| RNP APCH - GPS.                                                                |                                  |                                | MISSED APPROACH: Climb to 1600 then climb to 3000 direct GROSS and hold. |                    |
| For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10° C or above 54° C. |                                  |                                |                                                                          |                    |
| ASR                                                                            |                                  |                                |                                                                          |                    |
| ATIS<br>128.35                                                                 | KNOXVILLE APP CON<br>123.9 360.8 | KNOXVILLE TOWER<br>121.2 257.8 | GND CON<br>121.9 348.6                                                   | CLNC DEL<br>121.65 |

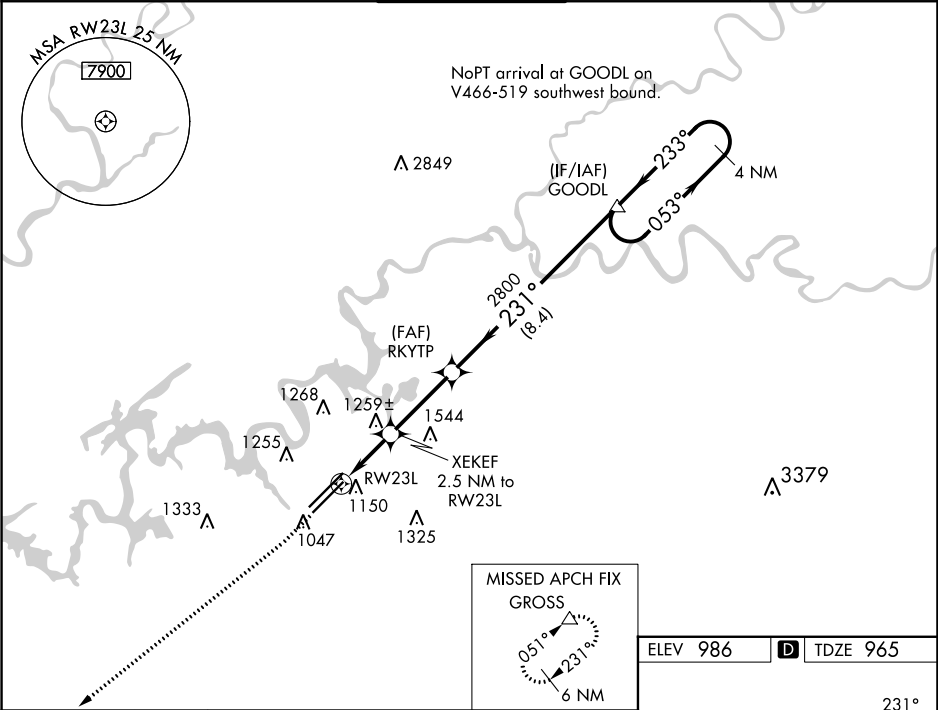

|              |                    |                    |                                        |
|--------------|--------------------|--------------------|----------------------------------------|
| 1600         |                    | 3000               | GROSS                                  |
| ↑            |                    | ↑                  | △                                      |
| RW23L        |                    | RW23L              | RW23L                                  |
| 1.6 NM       |                    | 0.9 NM             | 3.1 NM                                 |
| 1800         |                    | 2800               | 3500                                   |
| 231°         |                    | 231°               | 231°                                   |
| 2800         |                    | 2800               | 3500                                   |
| GP 3.00°     |                    | TCH 52             |                                        |
| CATEGORY     | A                  | B                  | C                                      |
| LPV DA       | 1165/40            |                    | 200 (200-¾)                            |
| LNAV/VNAV DA | 1383-1⅓            |                    | 418 (500-1⅓)                           |
| LNAV MDA     | 1520/55            | 555 (600-1)        | 1520-1⅓ 555 (600-1⅓)                   |
| CIRCLING     | 1520-1 534 (600-1) | 1620-1 634 (700-1) | 1660-2 674 (700-2) 1900-3 914 (1000-3) |

