


WAAS CH 42930 W14A	APP CRS 142°	Rwy Idg 8286 TDZE 1199 Apt Elev 1219
--	------------------------	---

RNAV (GPS) RWY 14
LINCOLN (LNK)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beatec altimeter setting and increase all DA 91 feet and all MDA 100 feet, increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile, increase LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Beatec altimeter setting.


MISSED APPROACH: Climb to 3100 direct OWSEW and hold.

ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	LINCOLN TOWER★ 118.5(CTAF) 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4	UNICOM 122.95
----------------------	------------------------------	-------------------------------------	------------------------	-------------------------	------------------

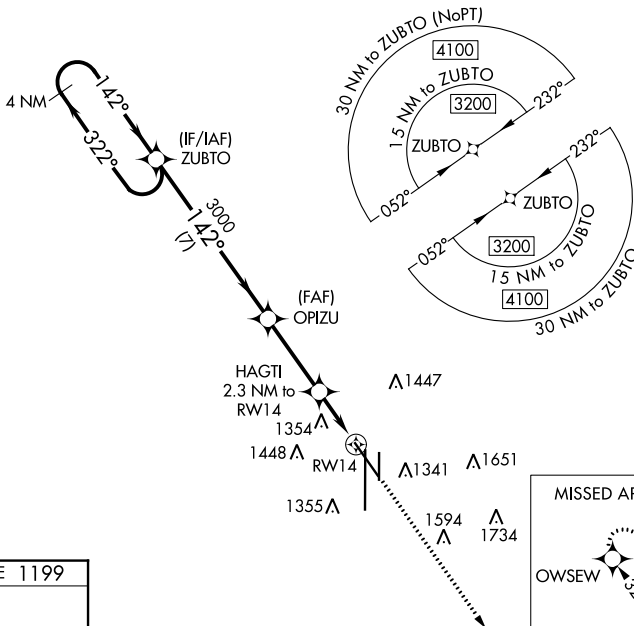

MISSED APCH FIX

ELEV 1219	D	TDZE 1199
-----------	----------	-----------



HIRL Rwy 18-36
REIL Rwy 14 and 17
MIRL Rwy 14-32 and 17-35

4 NM Holding Pattern

ZUBTO

OPIZU

HAGTI
2.3 NM to RW14

3200

3000

322°

142°

7 NM

3.2 NM

1.1 NM

1.2 NM

*1960

*LNNAV only

3100

OWSW

GP 3.00°

TCH 48

1.2 NM to RW14

RW14

RNAV (GPS) RWY 14