

APP CRS
170°

Rwy Idg 10000
TDZE 485
Apt Elev 501

RNAV (RNP) Z RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP AR APCH. RF required.

▼


For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1 3/4 SM. Simultaneous approach authorized, except for arrivals at KAEDN, ALANB, and COBLR.

MALSR

A5

MISSED APPROACH: Climb to 3000 on track 170° to TEYUD right turn to JIPAD and on track 292° to NADDI and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
-------------------	-------------------------------------	---------------------------------	------------------------	-------------------------	-------

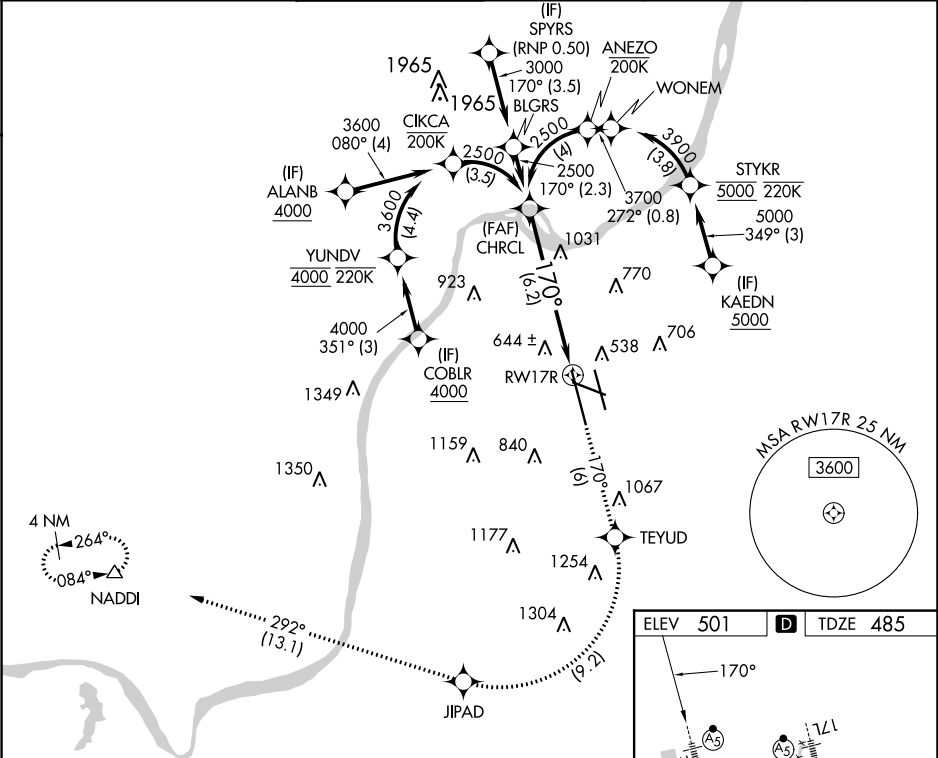

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 64).

3000

TEYUD


JIPAD

tr 292°

NADDI

CHRCL

2500

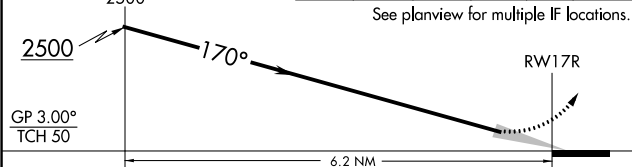


CATEGORY	A	B	C	D
RNP 0.30 DA	974/60	489 (500-1)		

AUTHORIZATION REQUIRED

ELEV 501

D

TDZE 485

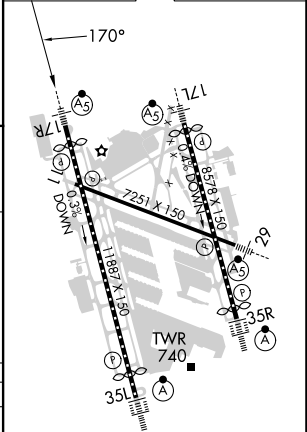

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L and 35R