


|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>50429</b><br><b>W22A</b> | APP CRS<br><b>225°</b> | Rwy Idg<br>TDZE <b>2855</b><br>Apt Elev <b>2872</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 22  
MIDLAND INTL AIR AND SPACE PORT (MAF')

|                                                                                                                           |                                                       |
|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH.<br>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 25°C. Circling Rwy 16L NA at night. | MISSED APPROACH: Climb to 5000 direct TOKRE and hold. |
|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|

|                              |                                        |                                               |                               |                                  |                         |
|------------------------------|----------------------------------------|-----------------------------------------------|-------------------------------|----------------------------------|-------------------------|
| ATIS<br><b>126.8 235.975</b> | MIDLAND APP CON*<br><b>124.6 290.4</b> | MIDLAND TOWER*<br><b>118.7 (CTAF) 0273.45</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>118.05 317.65</b> | UNICOM<br><b>122.95</b> |
|------------------------------|----------------------------------------|-----------------------------------------------|-------------------------------|----------------------------------|-------------------------|

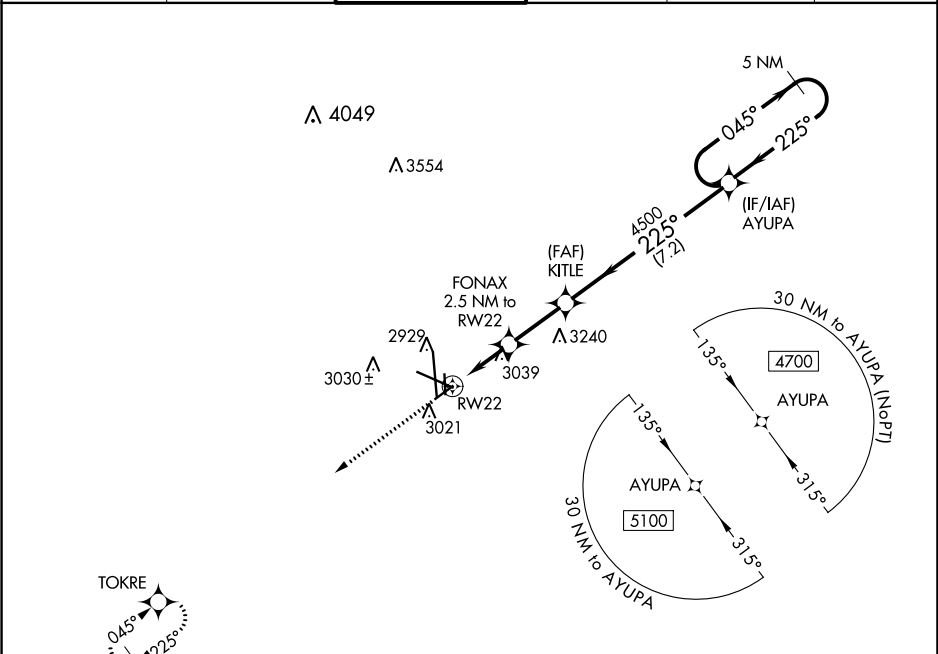

|                       |                                                                |
|-----------------------|----------------------------------------------------------------|
| ELEV 2872             | TDZE 2855                                                      |
| 5000 TOKRE            |                                                                |
| *LNAV only            |                                                                |
| FONAX 2.5 NM to RW22  | KITLE 4500                                                     |
| *1.3 NM to RW22       | AYUPA 5 NM Holding Pattern                                     |
| *3700                 | 4700                                                           |
| GP 3.00° TCH 50       |                                                                |
| 1.3 1.2 2.5 NM 7.2 NM |                                                                |
| CATEGORY              | A B C D                                                        |
| LPV DA                | 3055-3/4 200 (200-3/4)                                         |
| LNAV/VNAV DA          | 3317-13/8 462 (500-13/8)                                       |
| LNAV MDA              | 3320-1 465 (500-1) 3320-13/8 465 (500-13/8)                    |
| CIRCLING              | 3440-1 568 (600-1) 3440-11/2 568 (600-11/2) 3520-2 648 (700-2) |

